TACTICS ™ HARDWIRE RACEWAY
Installation Instructions

Tools Required
Square or Cross-recess (Phillips™) screwdriver

The following instructions are for the installation of hardwire raceways on non-powered Tactics tables. Read entire installation instructions thoroughly before installing product.

WARNING: To avoid SHOCK HAZARDS, all circuit power MUST BE DISCONNECTED before installation or removal of electrical components, or when making any electrical connection or disconnection.

NOTE: Connection of wiring devices and other associated wiring **MUST** be done by a licensed electrician, who must control the size and loading of each branch circuit. The person or group installing this product is responsible for complying with all national and local code requirements.

NOTE: When installing in the City of Chicago, this system has to be hard wired under authority of a permit by a contractor licensed and registered in the City of Chicago.

NOTE: Quick snap connections and harnesses are not allowed in the City of Chicago.

Every installation should have an accurate plan illustrating the electrical layout. This plan should be provided by an architect or electrician

Installation

1. Determine the location the hardwire raceway is to be installed from the table electrical layout.

2. Open or remove modesty panels **(Fig.1)**. Position the hooks of the hardwire raceway into the slots in the metal channel mounted to the underside of the table top **(Fig. 2)**. Push the hooks fully into the slots and slide the hardwire raceway toward the end of the table so that the hooks engage the metal channel. Secure the hardwire raceway by installing a mounting screw through the appropriate hole in the raceway into the metal channel **(Fig.2)**.

The eight foot table receives two hardwire raceways interconnected by a flexible conduit. Install each raceway separately as described above. Remove a knockout in each adjacent junction box. Install conduit fittings into knockouts. Install flexible conduit into conduit fittings and tighten screw in conduit fitting to retain the flexible conduit.

3. To route power to the next table, remove a knockout from the junction box. Install conduit fitting into knockout. Install flexible conduit into conduit fittings and tighten screw in conduit fitting to retain the flexible conduit. Route flexible conduit through modesty end panel grommets and "J" channels attached to underside of table, to modesty channel of the next table. Remove a knockout from the junction box. Install conduit fitting into knockout. Install flexible conduit into conduit fittings and tighten screw in conduit fitting to retain the flexible conduit **(Fig. 3)**.

4. Install other electrical products as called for by the electrical layout. Install blank plates to junction boxes not being utilized by receptacles or a base feed. Replace modesty panels.

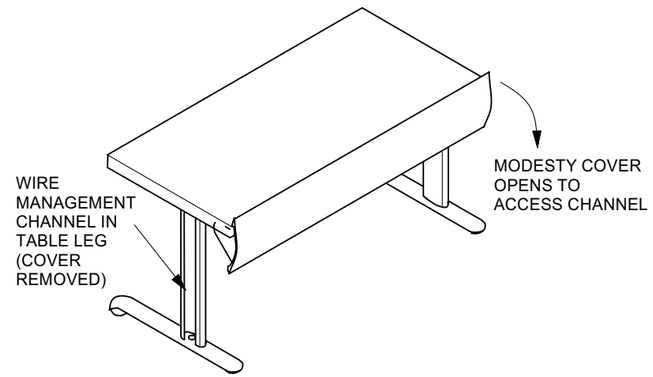


FIG. 1 TABLE WITH MODESTY COVER IN PLACE (COVERING PDA)

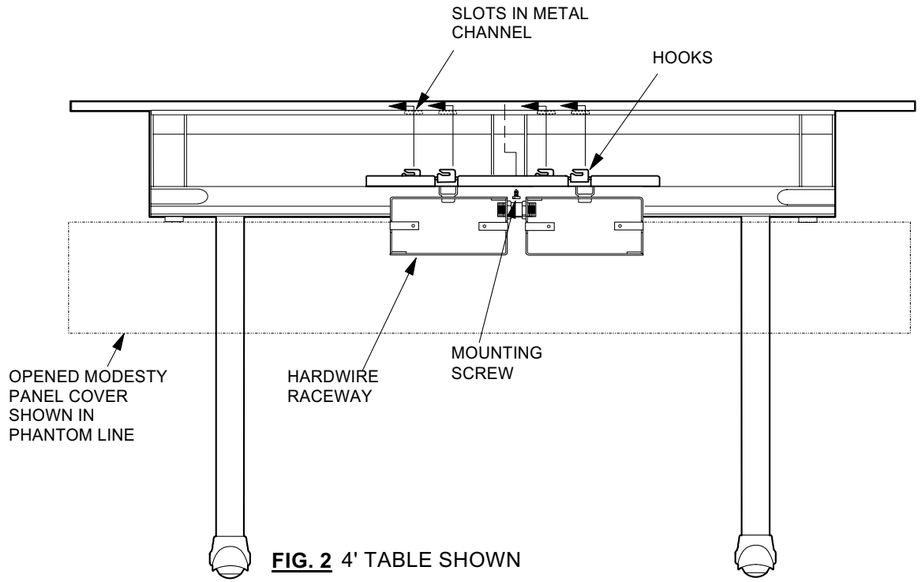


FIG. 2 4' TABLE SHOWN

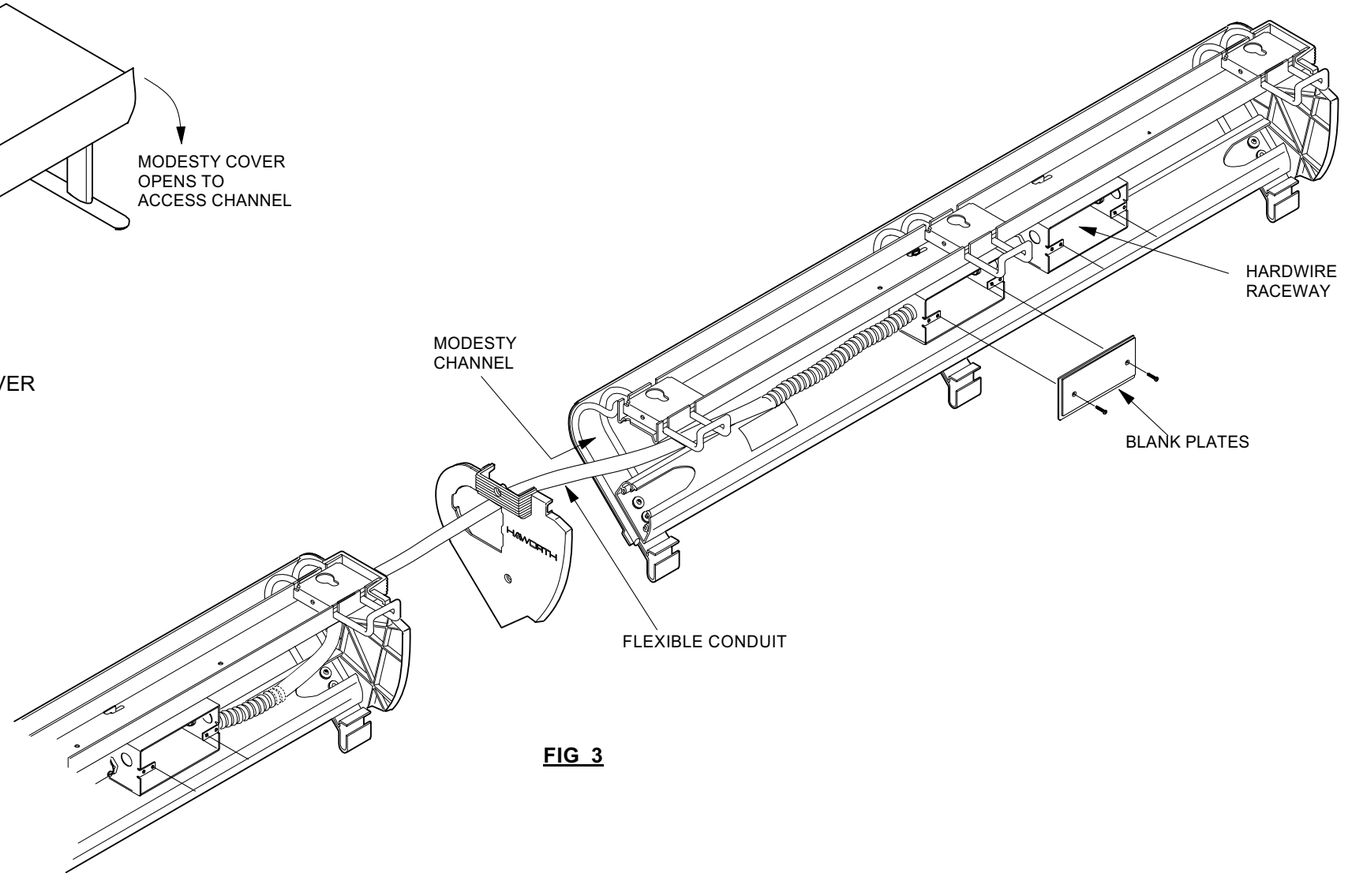


FIG 3

CONDUIT À CÂBLER TACTICS ™
Notice de Montage

Outlis
Tournevis à pointe cruciforme (Phillips™) ou carré

Les instructions suivantes portent sur l'installation de la conduite de cablée sur les tables Tactics sans alimentation électrique. Lire la notice en entier avec la plus grande attention avant d'entreprendre l'installation des connecteurs d'alimentation.

AVERTISSEMENT: Il faut DÉBRANCHER touts les circuits de puissance avant un montage ou démontage de composants électriques afin d'éviter tout RISQUE D'ÉLECTROCUTION.

NOTE: Les raccordements des équipements à câbler et autres câblages associés **DOIVENT** être effectués par un électricien agréé qui doit vérifier la taille et la charge de chaque dérivation du circuit. C'est à la personne ou au groupe installant ce produit que revient la responsabilité de la conformité à tous les codes nationaux et locaux.

Il faut disposer pour chaque installation d'un plan détaillé illustrant l'implantation électrique. Ce plan doit être fourni par l'architecte ou l'ingénieur électricien.

Installation

1. Déterminér à l'aide du plan électrique de la table, l'emplacement où la conduite câblée doit être installée.

2. Ouvrir ou retirer les panneaux d'habillage de la table **(Fig.1)**. Placer les crochets de la conduite à câbler dans les encoches de la canalisation métallique montée à la face inférieure de la table **(Fig. 2)**. Introduire les crochets à fond dans les encoches et glisser la canalisation à câbler vers l'extrémité de la table de façon à ce que les crochets s'emboîtent dans la canalisation métallique. Fixer la canalisation à câbler en montant une vis dans le trou correspondant de la conduite métallique **(Fig.2)**.

La table de 2,40 m de long reçoit deux conduites à câbler reliées par un conduit souple. Monter les conduites séparément selon les explications ci-dessus.
Retirer une pastille défonçable dans chacune des boîtes de raccordement voisines. Monter les raccords de conduits dans les défoncements. Monter les conduits souples dans les raccords de conduits et serrer la vis si l'on veut que le raccord maintienne le conduit souple.

3. Pour acheminer le courant à la table suivante, retirer une pastille défonçable de la boîte de raccordement. Monter le raccord de conduit dans le défoncement. Monter le conduit souple dans les raccords de conduit et serrer la vis si l'on veut que le raccord maintienne le conduit souple. Acheminer le conduit souple à la canalisation du panneau d'habillage de la tableet la canalisation en forme de "J" fixée au dessous de la table, suivante par les passe-fils du panneau d'extrémité de l'habillage. Retirer une pastille défonçable de la boîte de raccordement. Monter le raccord de conduit dans le défoncement. Monter le conduit souple dans les raccords de conduit et serrer la vis si l'on veut que le raccord maintienne le conduit souple **(Fig. 3)**.

4. Monter les autres produits électriques nécessaires pour l'installation indiqués sur le plan électrique. Placer des caches sur les boîtes de jonction non utillisées par des prises ou une alimentation par la base. Replacer les panneaux d'habillage.

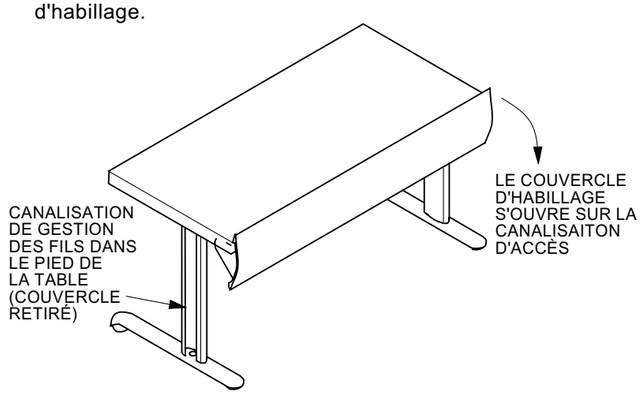


FIG. 1 TABLE AVEC COURVERCLE D'HABILLAGE EN PLACE (COUVRANT L'ENSEMBLE DE DISTRIBUTION DE COURANT)

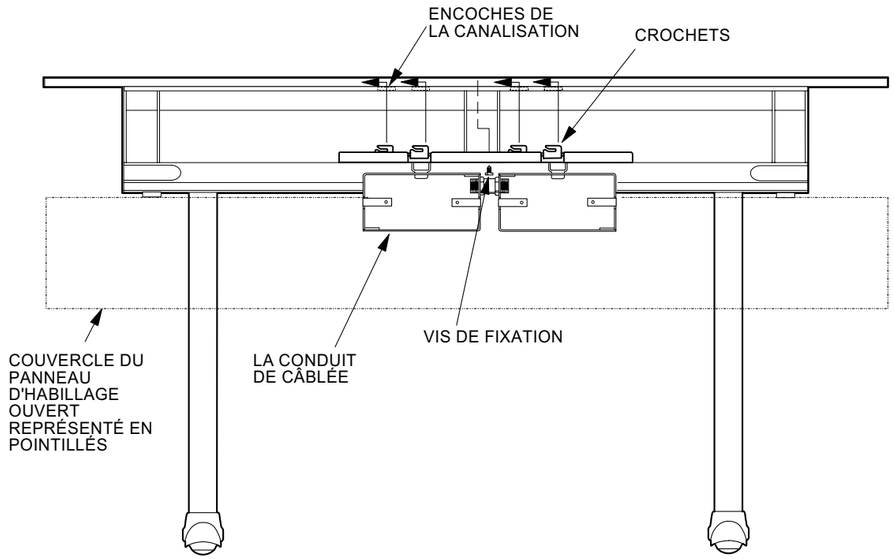


FIG. 2 REPRESENTATION DE LA TABLE DE 1,2 M (4 PIEDS)

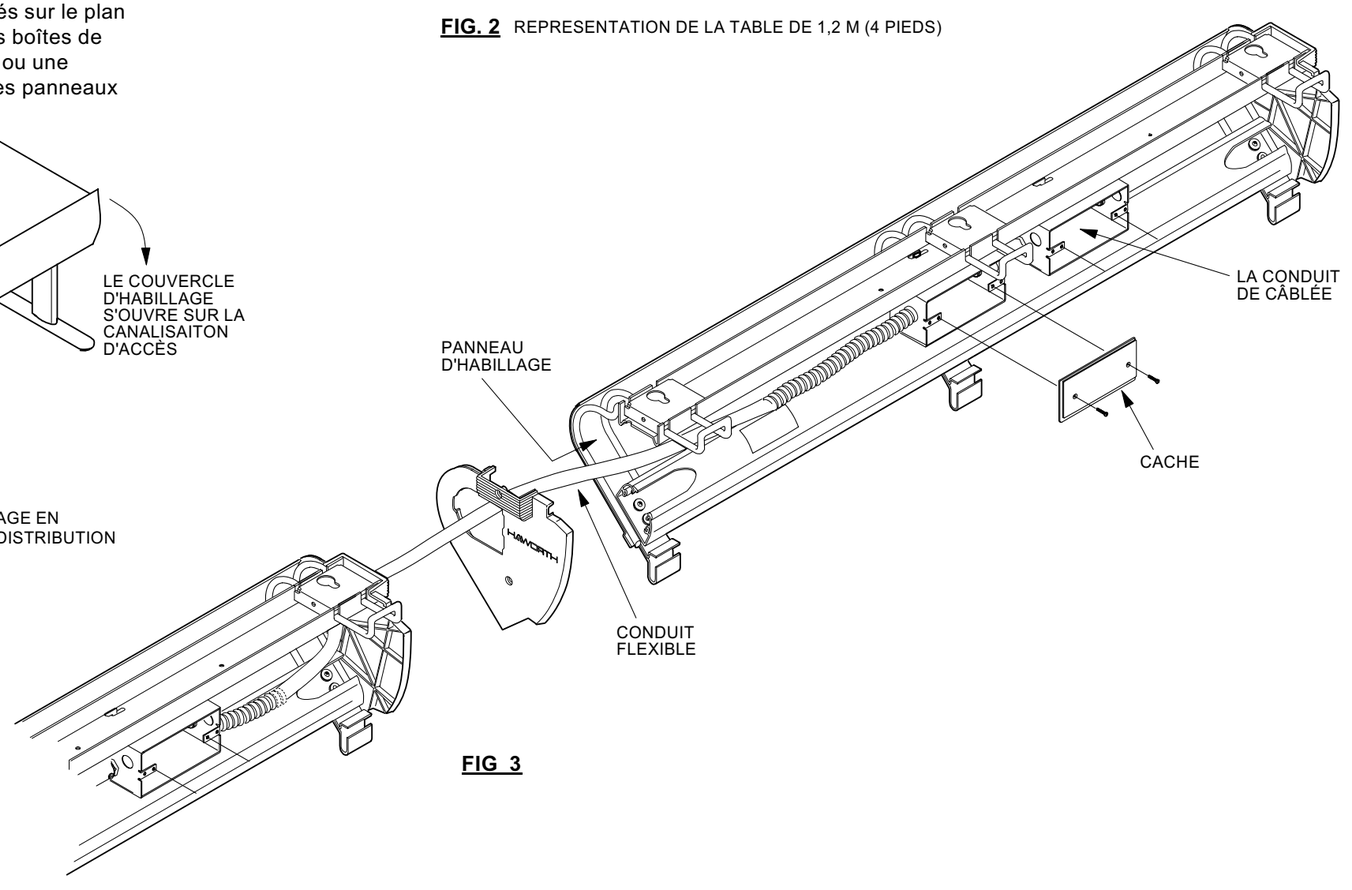


FIG 3

ASSISTANCE CLIENTÉLE: 1-800-426-8562