GROUPE LACASSE

Tasklight

Installation Instructions

1.

Slide 2 mounting bars into slots in the tasklight as shown **(FIG. 1)**.

Grip the ends of the tasklight and using your thumbs flex the front end of the mounting bars **(INSET #1)**.

Rest the rear end of the mounting bars on the rear flange on the underside of the bottom shelf **(FIG. 2)**.

Lift the front of the tasklight and allow the front end of the mounting bars to rest on the front flange on the underside of the bottom shelf **(FIG 2)**.

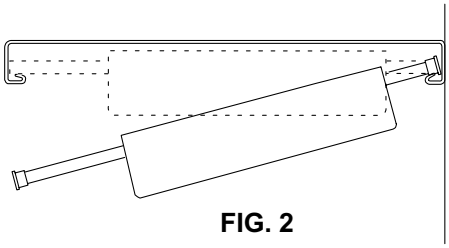


FIG. 2

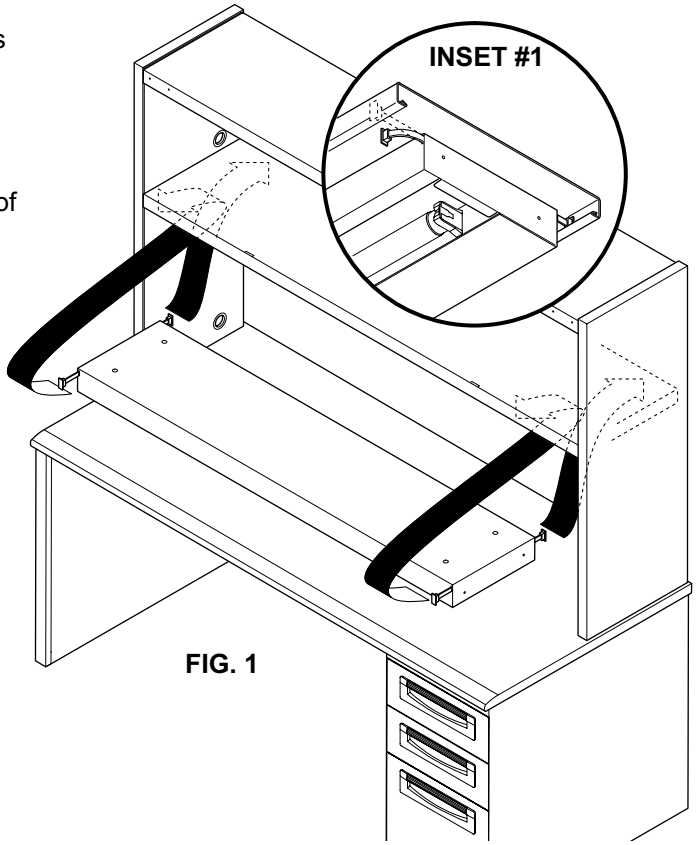


FIG. 1

2.

Slide the outer panel up until the grommet hole under the bottom shelf is visible. Pass the plug through the grommet hole and out the lower grommet as shown. Carefully slide the outer panel down into its original position.

NOTE: <u>For Chicago Task Lights Only</u> - The plug will not pass through the grommet hole provided. In order to utilize the wire management feature in the Hutch side panel, the Chicago task light cord must be disconnected from the task light and routed through the side panel as shown in **(FIG. 3)**, then reconnected to the task light before proceeding to step #1. For safety, a licensed electrician should disconnect and reconnect the task light wiring.

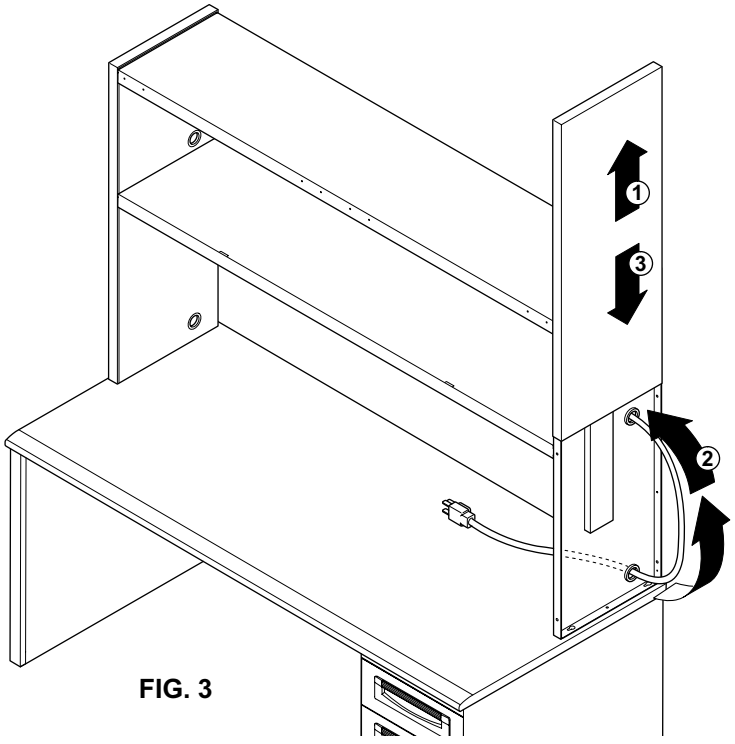


FIG. 3

Canada: 1-888-522-2773 & USA: 1-800-279-6557 Part # 7021-7785 ECO No. 401-189 Rev. B