

HAWORTH

Breck

Assembly Instructions

**Congratulations on your
purchase of a new Breck
Chair!**

Ready to assemble your new chair?


Follow all the steps carefully before using your chair.

That's it! Now you're ready to use your new chair.




No Tools Required


NOTE: Always grab the arms or back when removing chair back assembly (A).

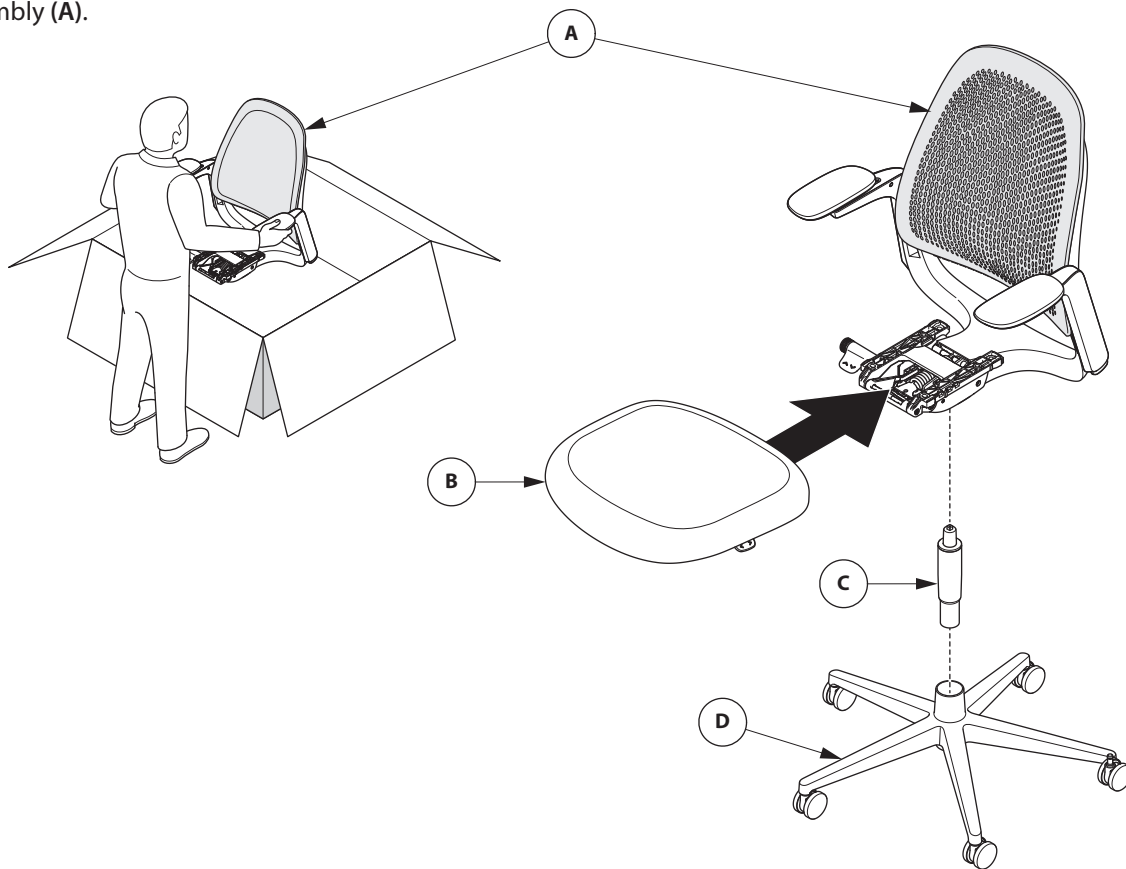

(A) Chair Back - Qty. 1

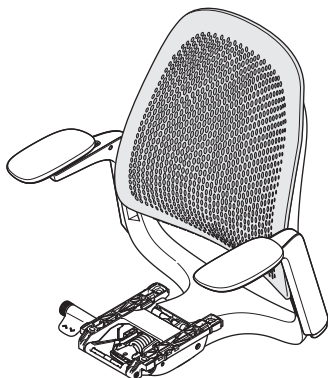


(B) Chair Seat - Qty. 1



(C) Chair Cylinder - Qty. 1




(D) Base - Qty. 1

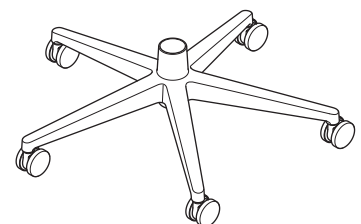

1


Insert cylinder (C) in to base (D)

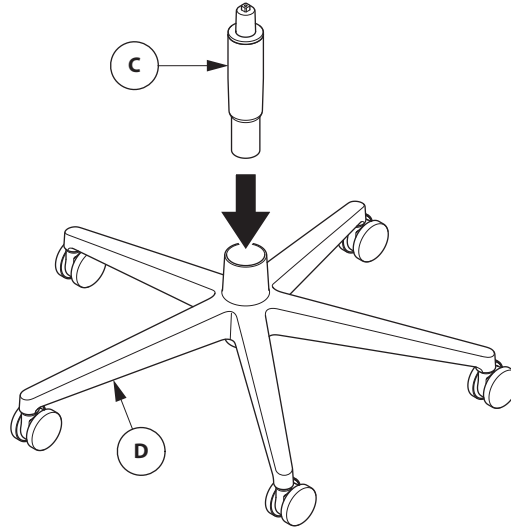


2

Assemble chair back (A) to base (D)

NOTE: Always grab the arms or back when removing chair back assembly (A).

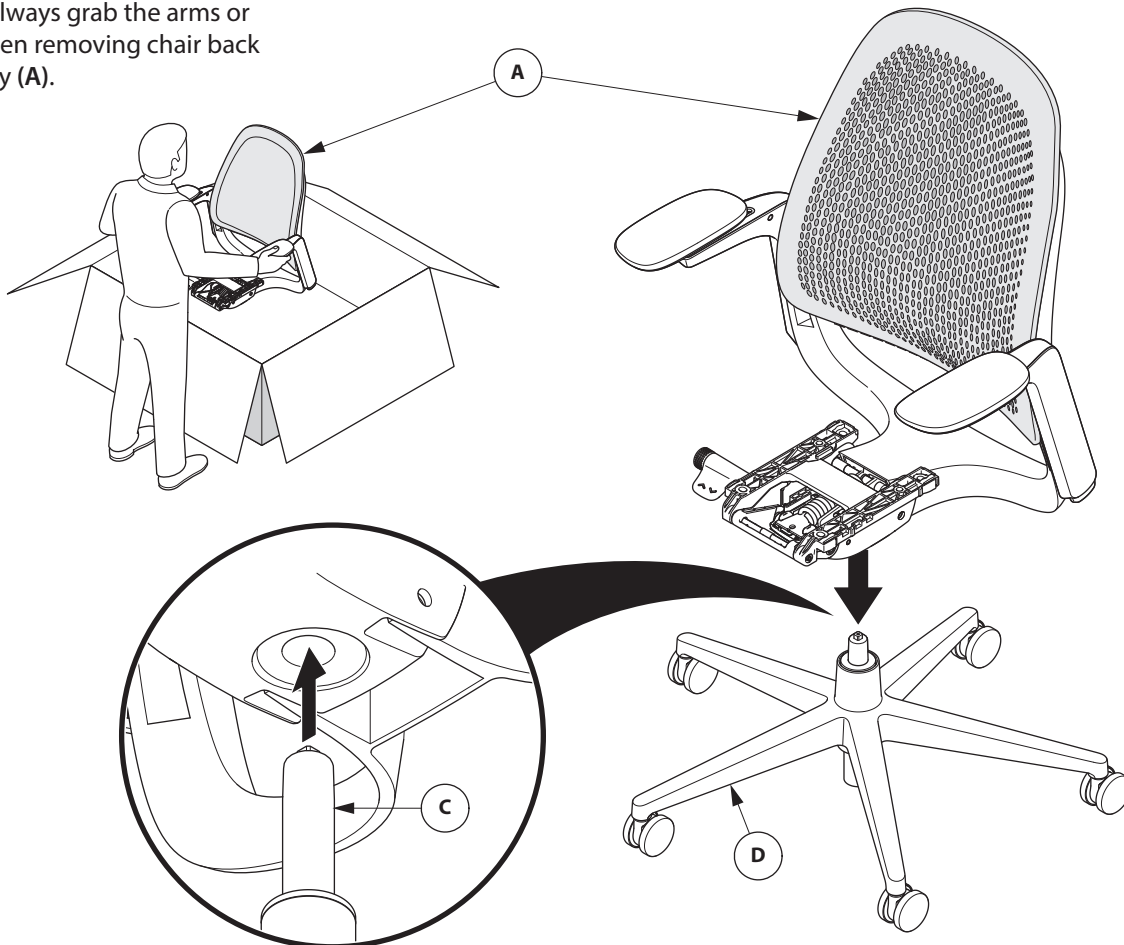

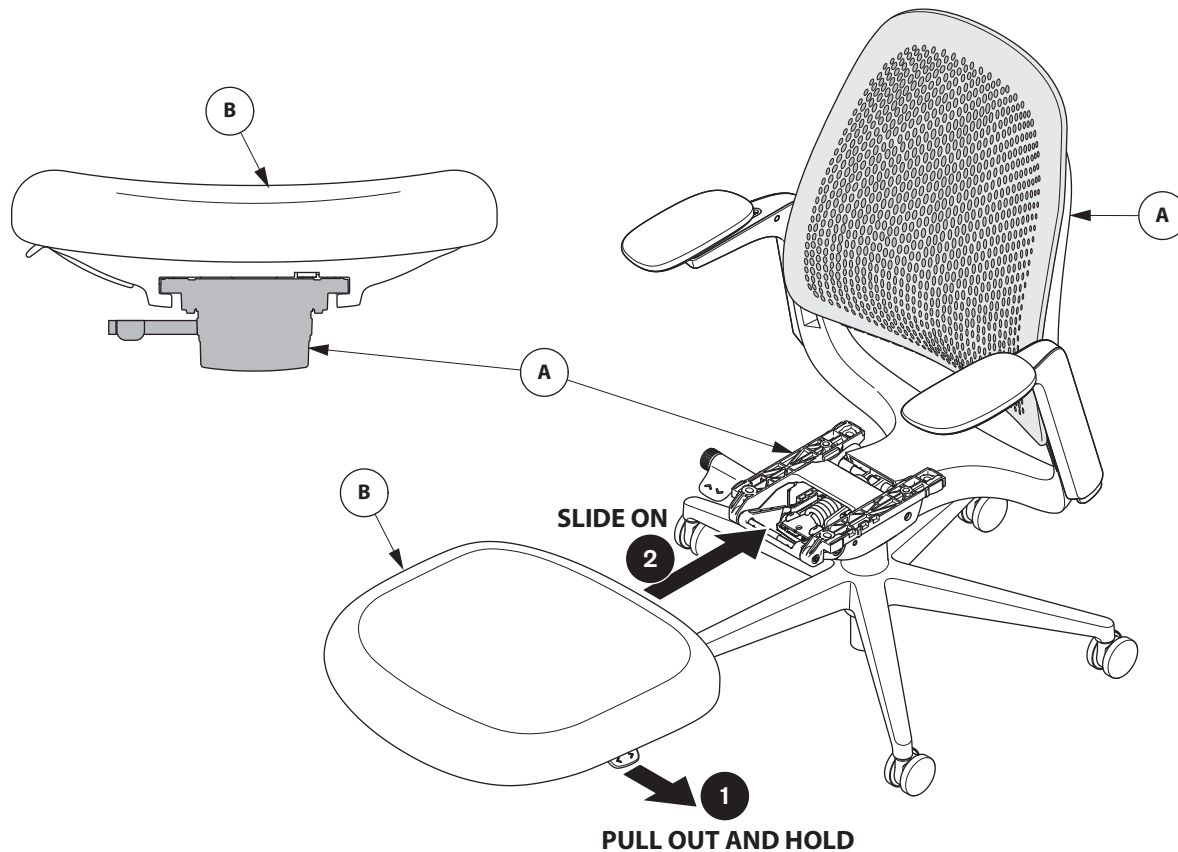3 Slide chair seat (B) to chair back (A)**4** Check to make sure the seat is on completely before sitting**5**

NOTE: Carefully sit for 10 seconds to ensure solid connection (75lbs minimum).

