
HAWORTH


Atwell


Service Instructions


Seat & Back Replacement - Side Chair

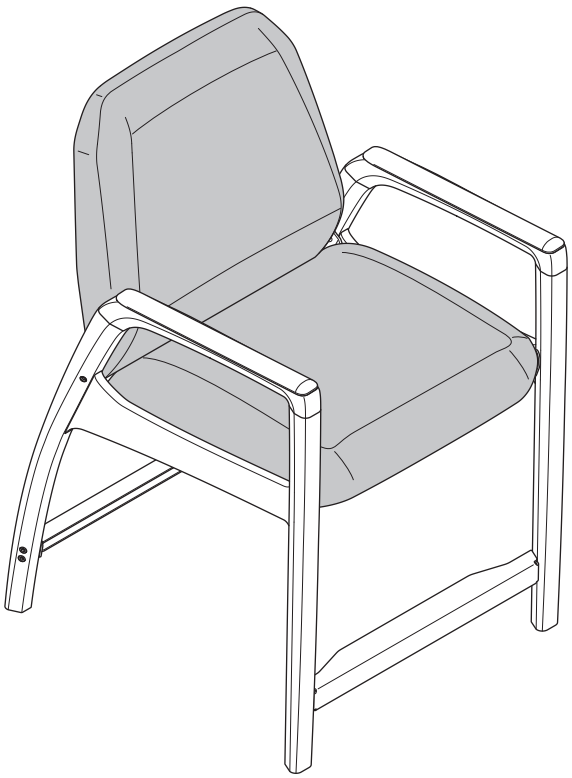


Tools Required













Parts

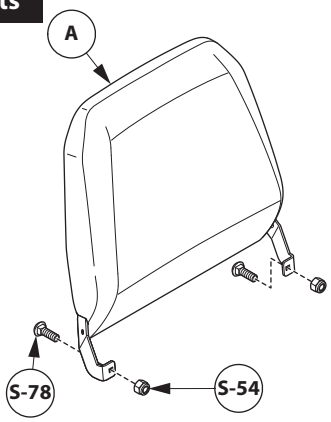

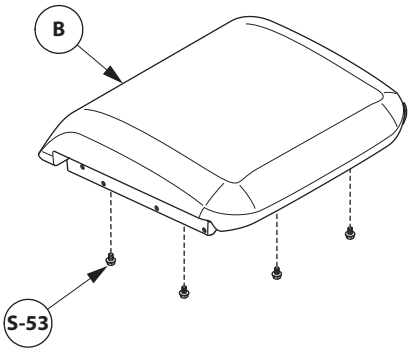


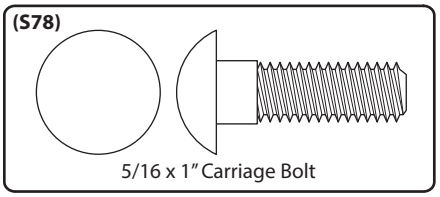




Seat Removal


1

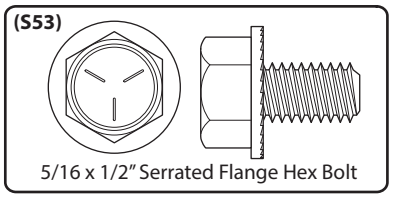


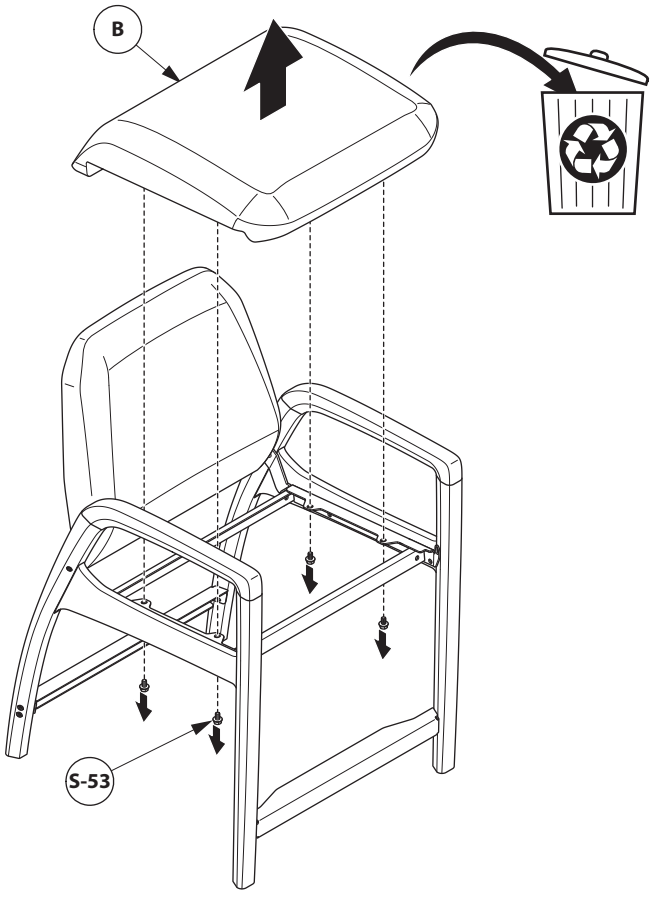


Back Removal

2






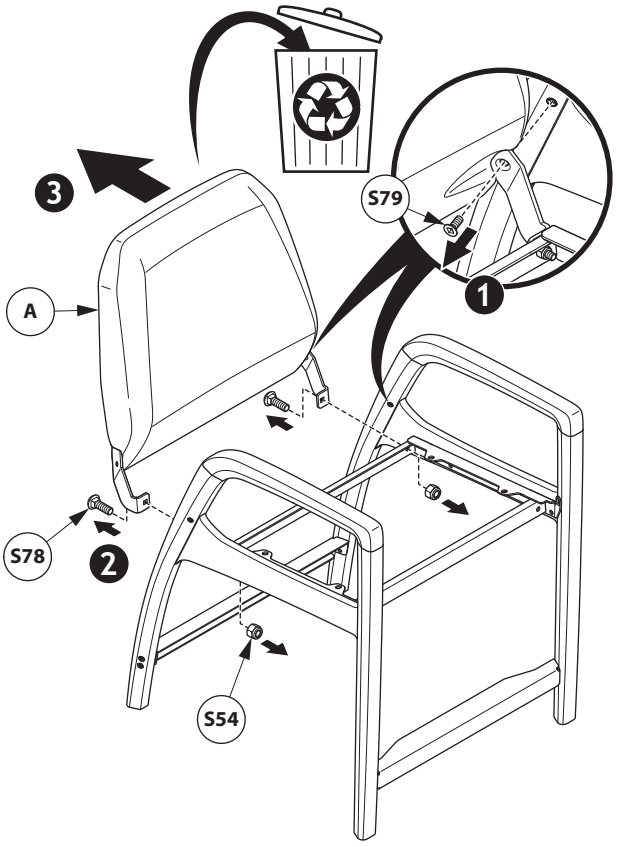

Back Installation


3

(S79)




5/16 x 3/4" Flat Head Screw

(S78)

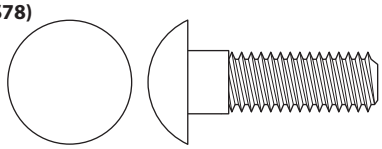


5/16 x 1" Carriage Bolt

(S54)




5/16-18 Lock Nut

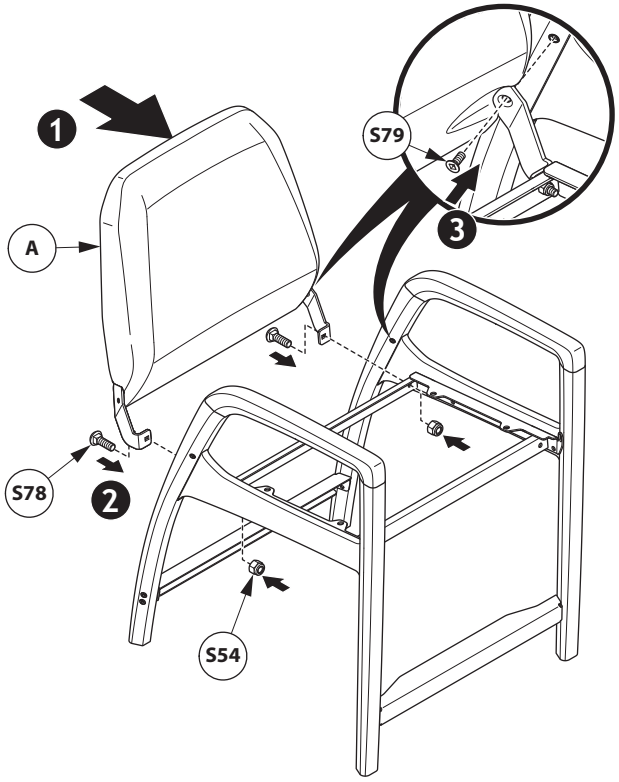

Seat Installation

4

(S53)



5/16 x 1/2" Serrated Flange Hex Bolt

