
HAWORTH

Fern


Assembly Instructions


Cylinder Service


Follow all the steps carefully before using your Chair.

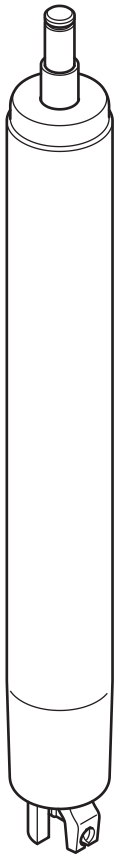



Tools Required

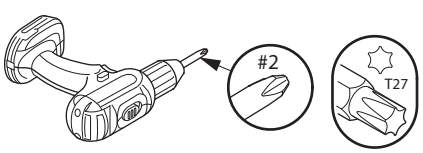












CYLINDER REPLACEMENT

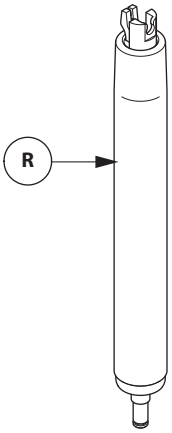


1 **Remove seat (E) (Refer to instructions 7029-9976 and follow steps 1-7)**

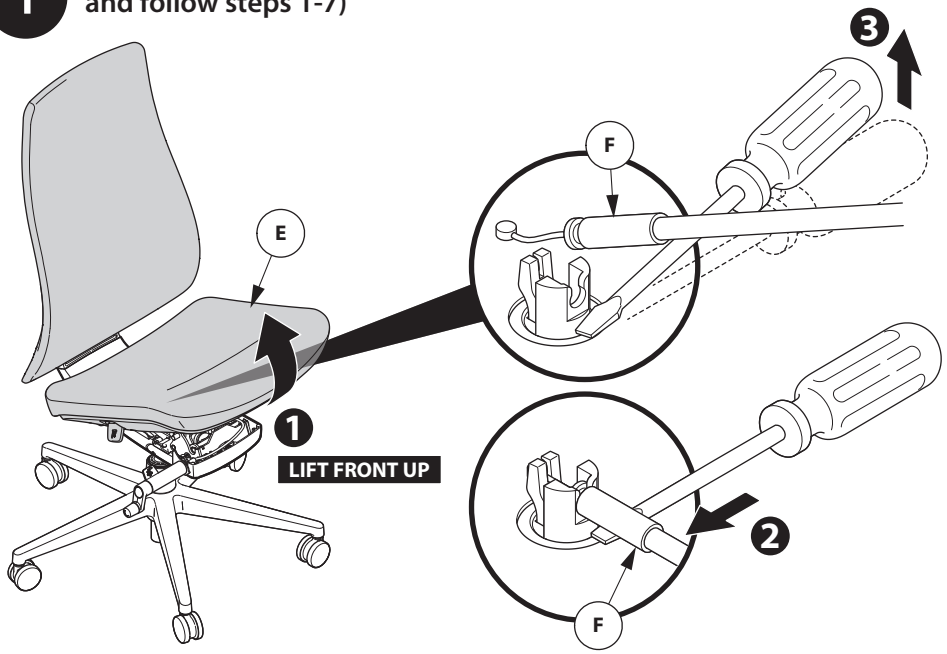


2 **Remove base (Q)**

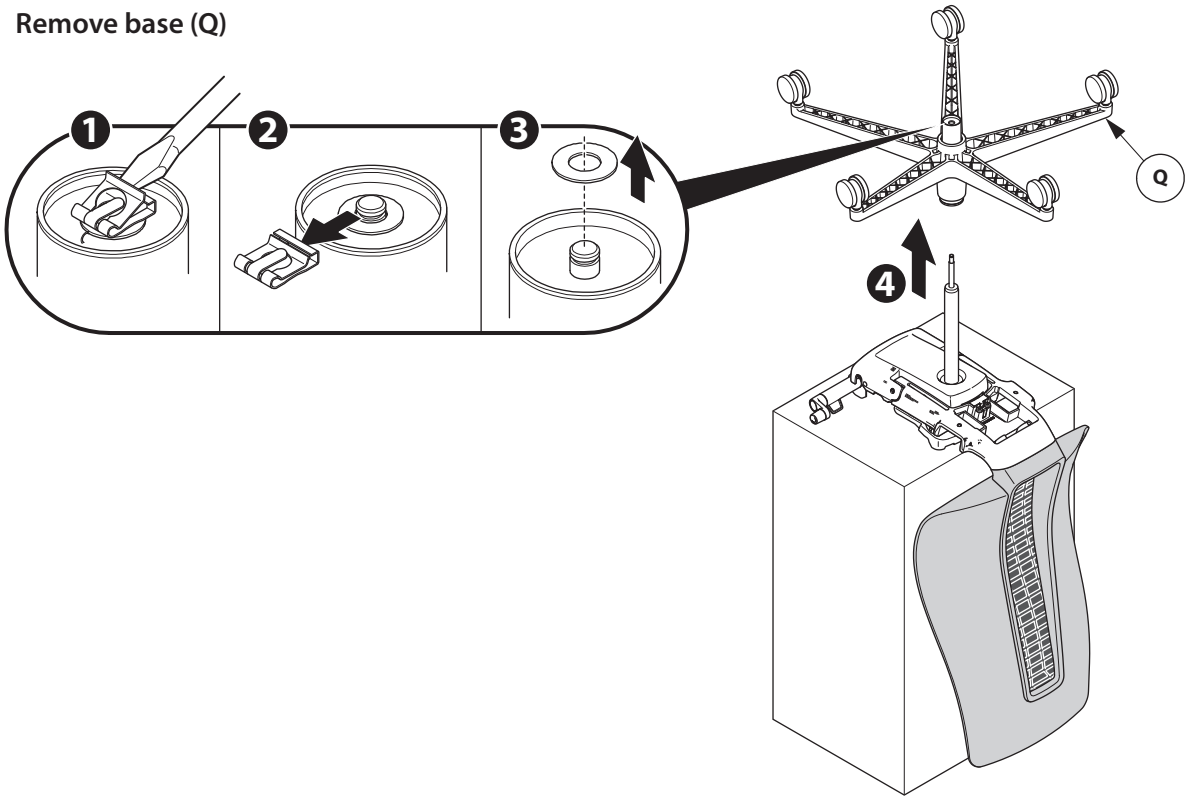

3 Remove cylinder (R1)

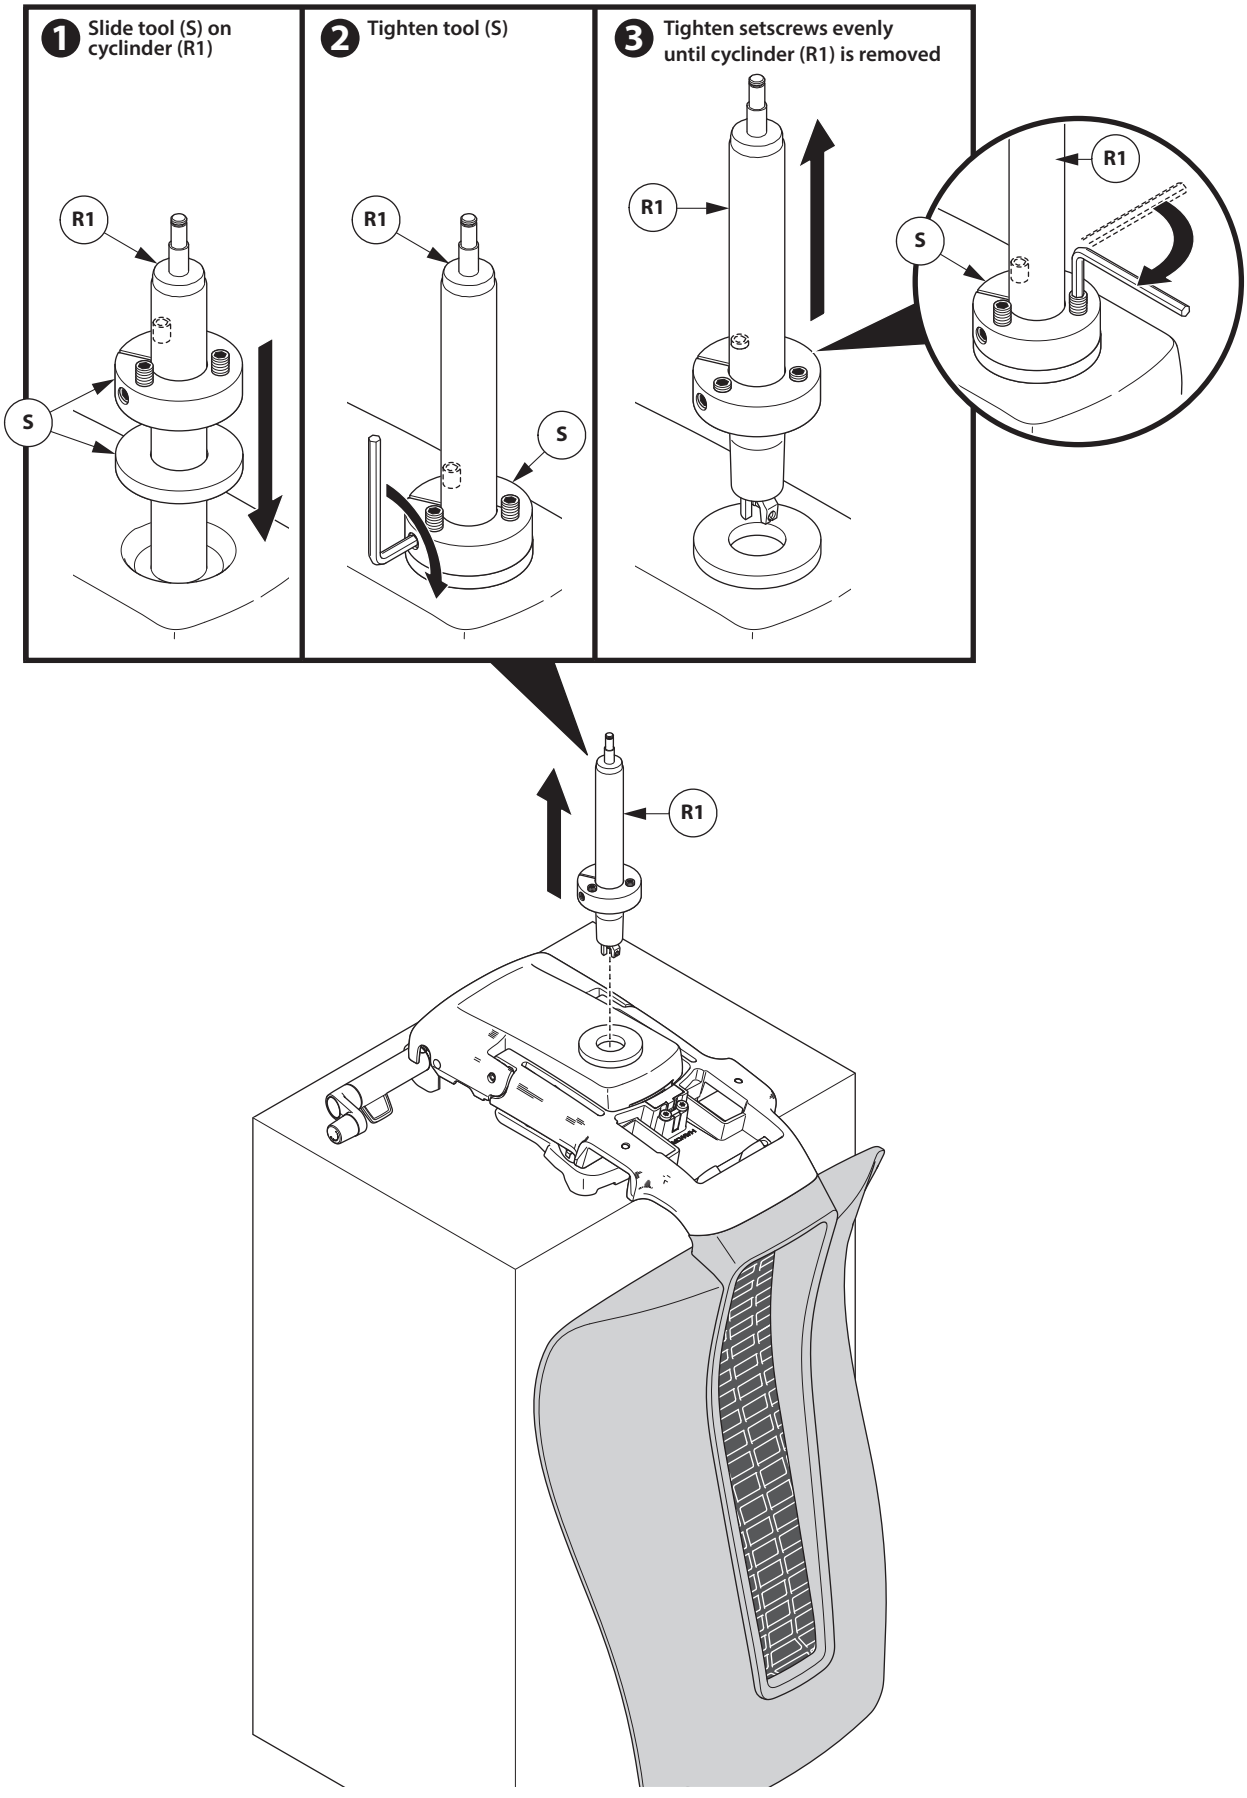


4 **Remove tool (S) and discard cylinder (R1)**

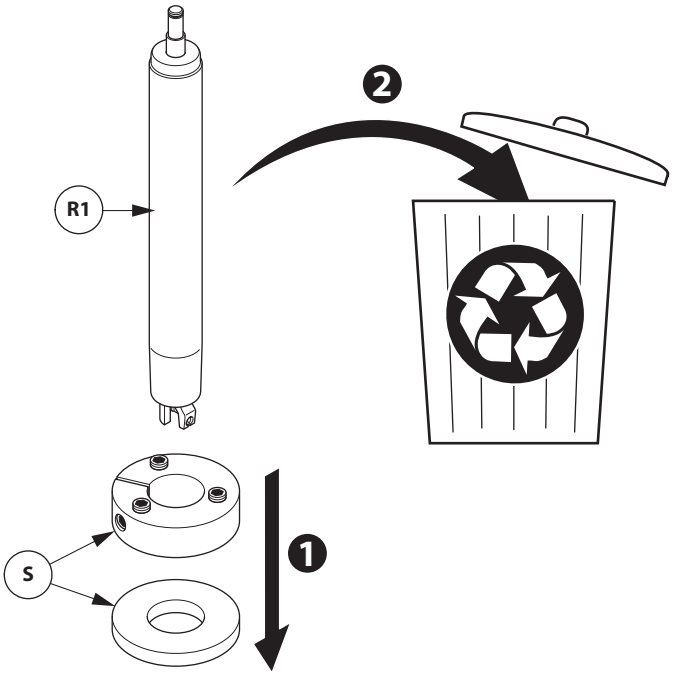

5 **Install new cylinder (R)**

6 **Install base (Q) (Refer to Step 2)**

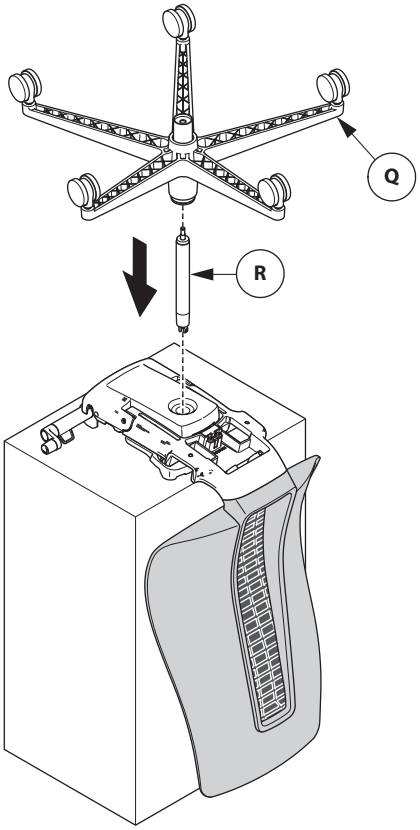

7 **Install seat (E) (Refer to instructions 7029-9976 and reverse steps 1-7)**

8 **Apply pressure to seat cylinder (E)**

