
VERY®


Spring Replacement - Mechanism

Installation Instructions


Tools Required

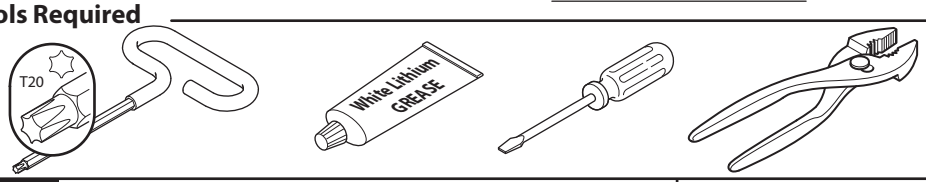


PARTS

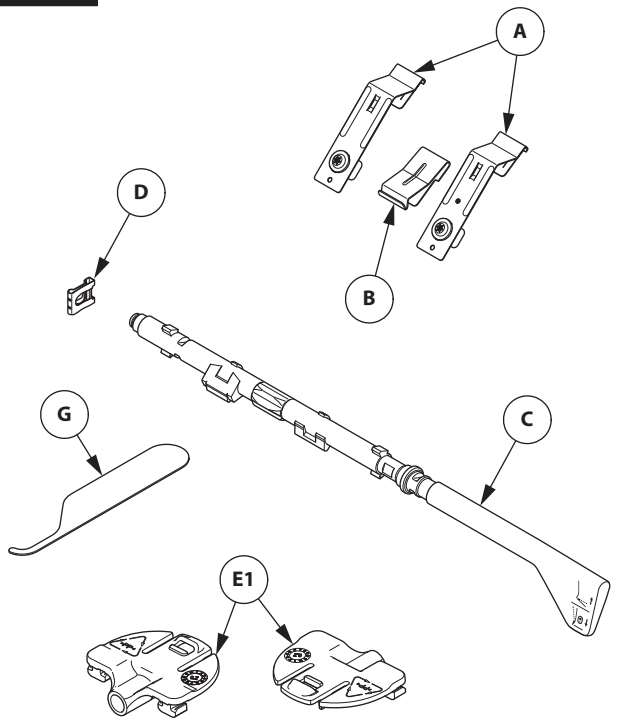


1 **Slide seat (A) back completely**

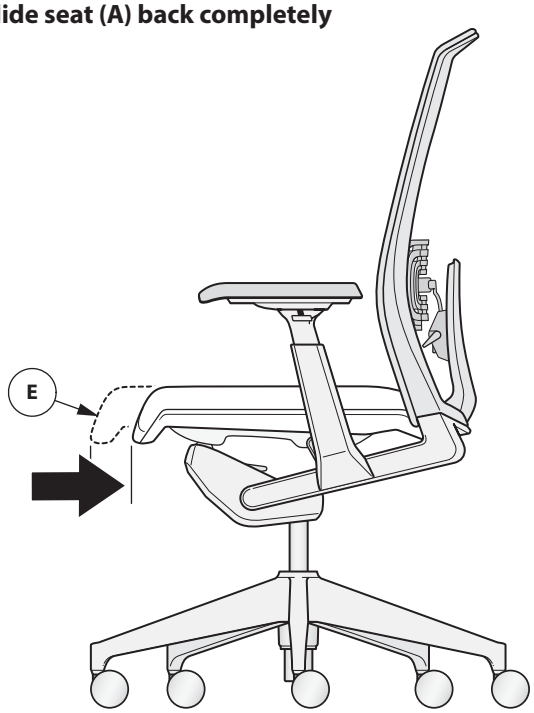

2

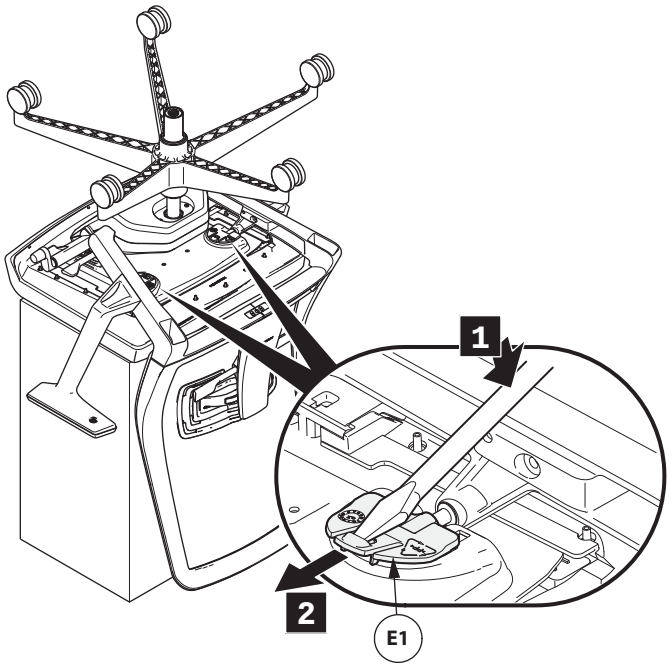


3

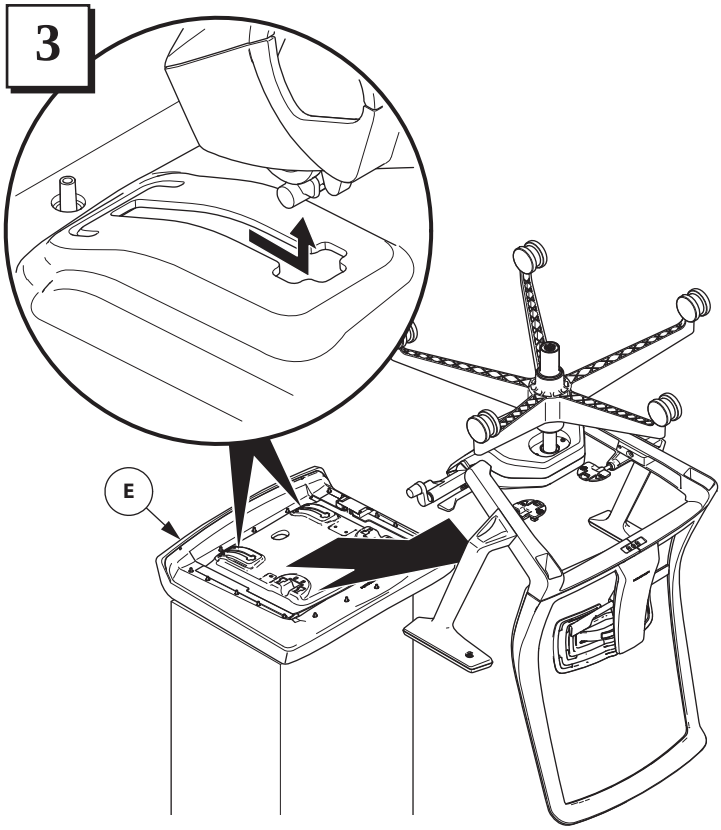


CUSTOMER SERVICE PHONE: 1-800-426-8562

4

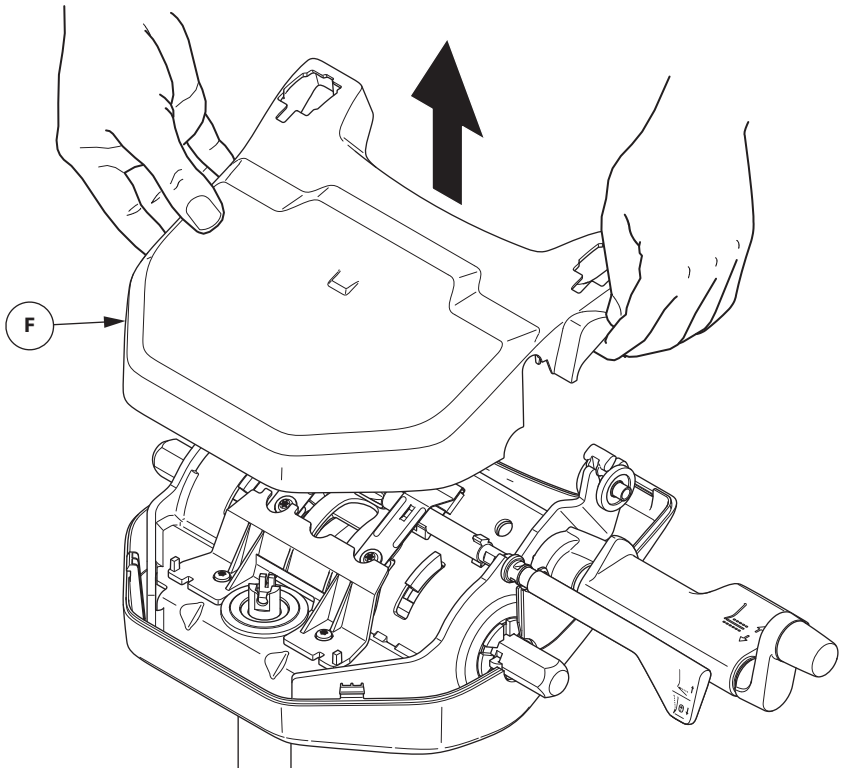


REMOVE SPRING CLIPS

5

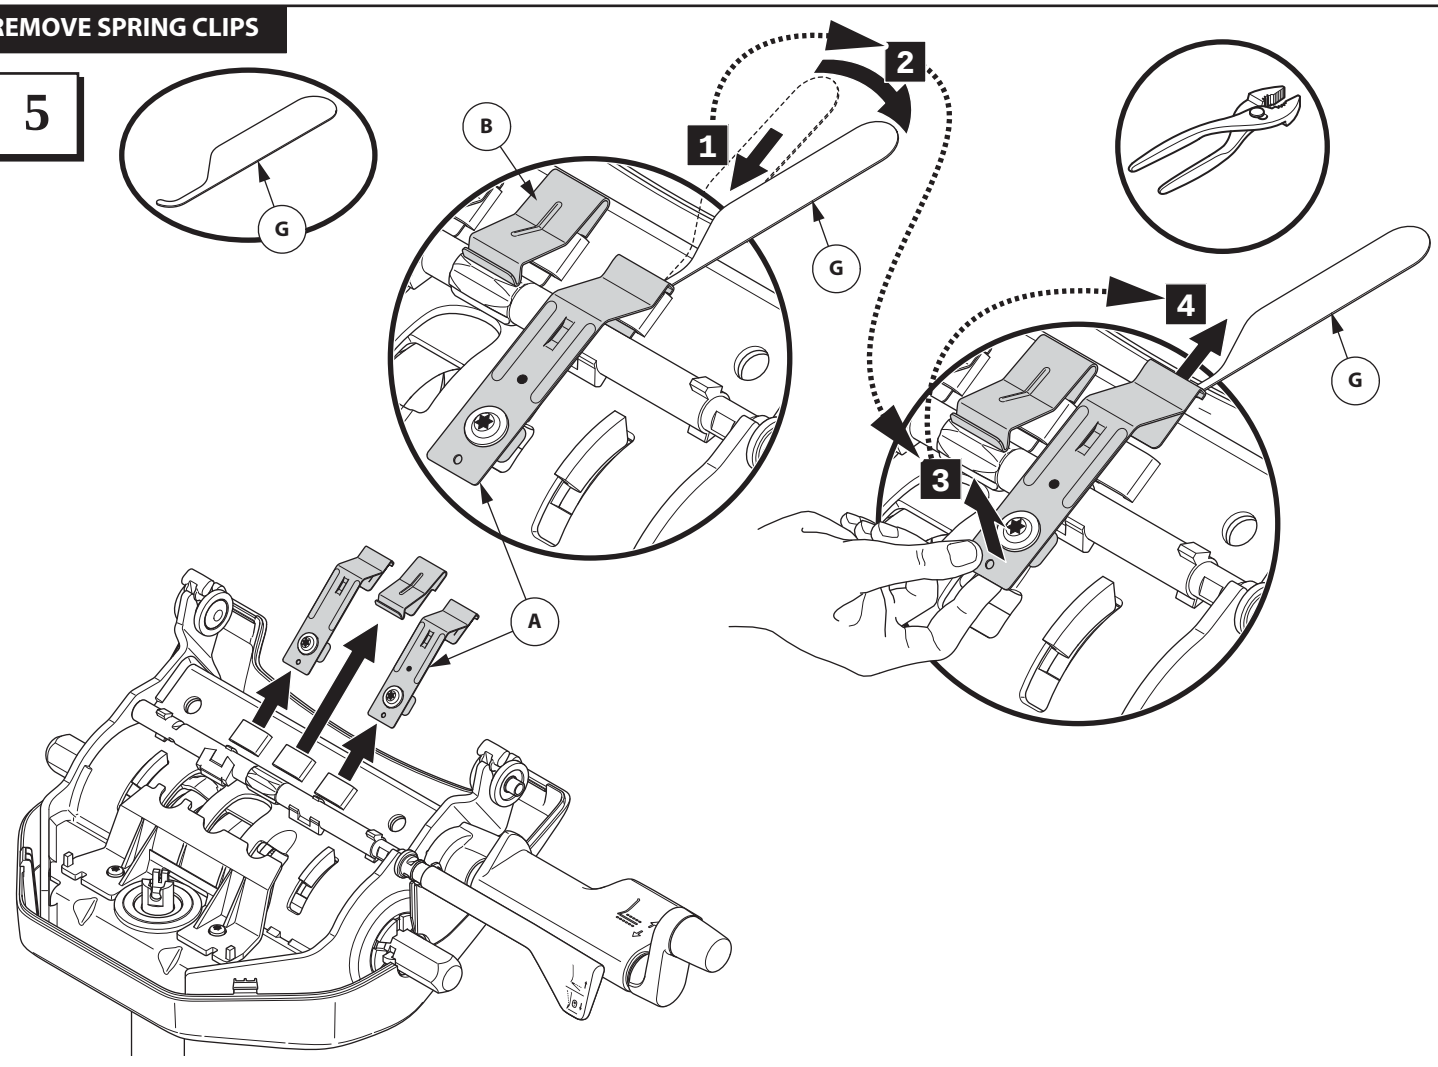

REMOVE & REPLACE ACTIVATION ARM


6

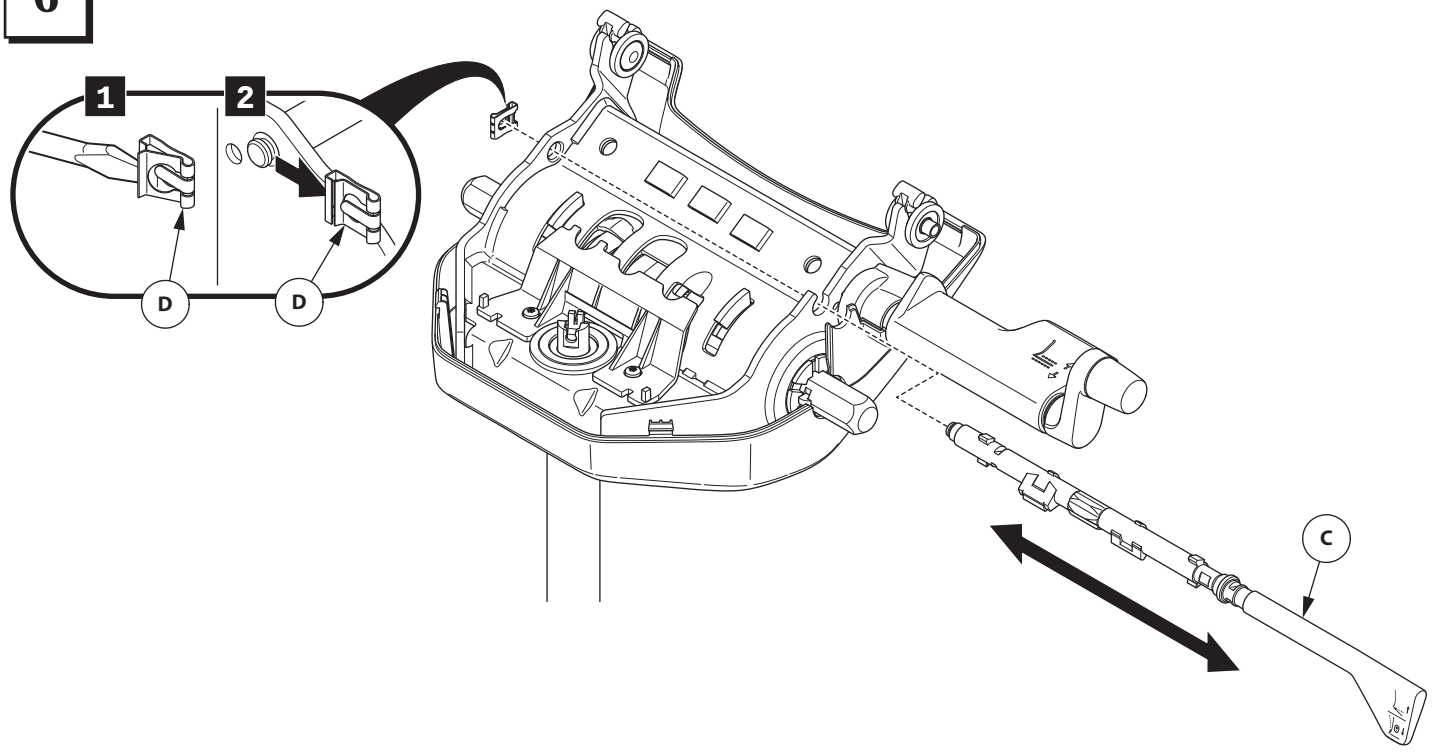

INSTALL SPRING CLIPS


7

NOTE: White Lithium Grease is supplied by the installer.

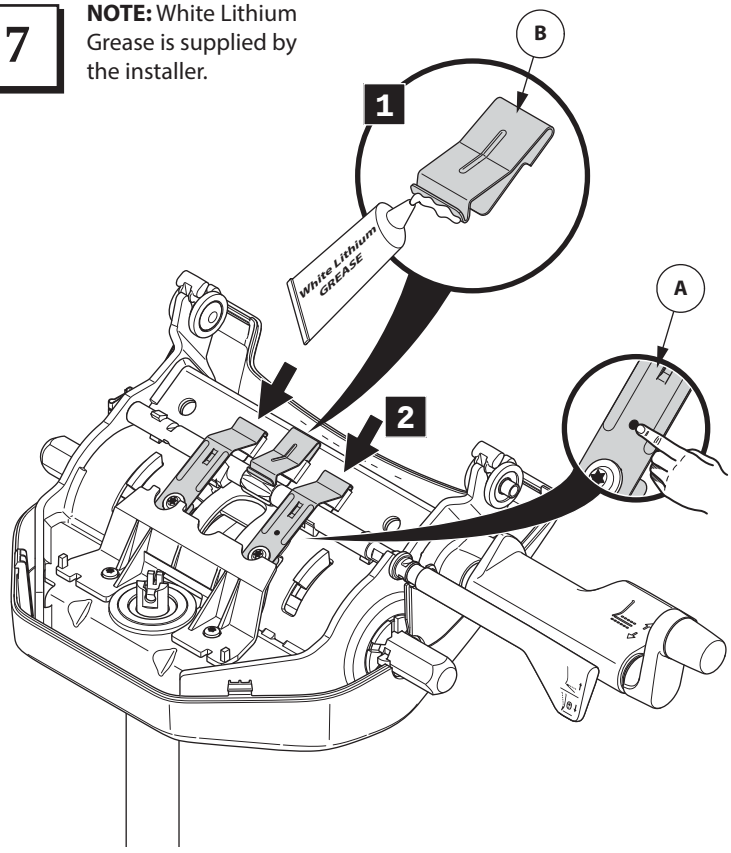

TUNING SPRING CLIPS

8

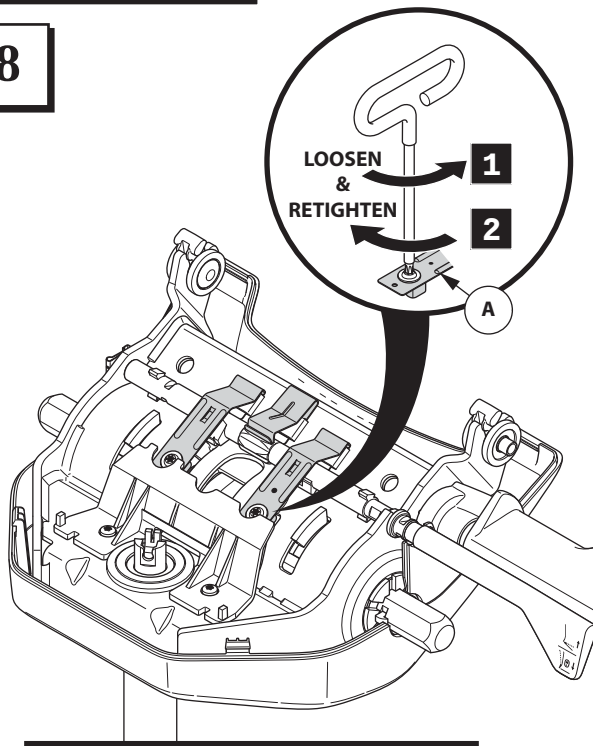

⚠ IMPORTANT!

LOOSEN AND RETIGHTEN SCREW ON SPRING CLIP (A) FOR PROPER ENGAGEMENT!

CUSTOMER SERVICE PHONE: 1-800-426-8562