
VERY®


Spring Replacement - Mechanism - Non-Tilt

Installation Instructions


Tools Required

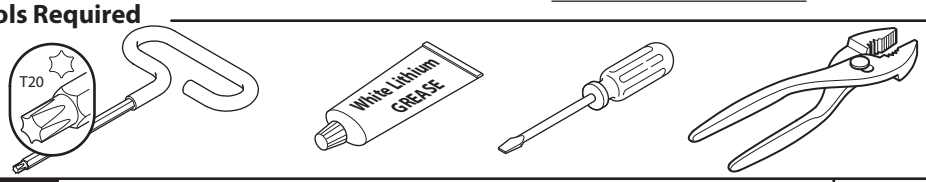


PARTS

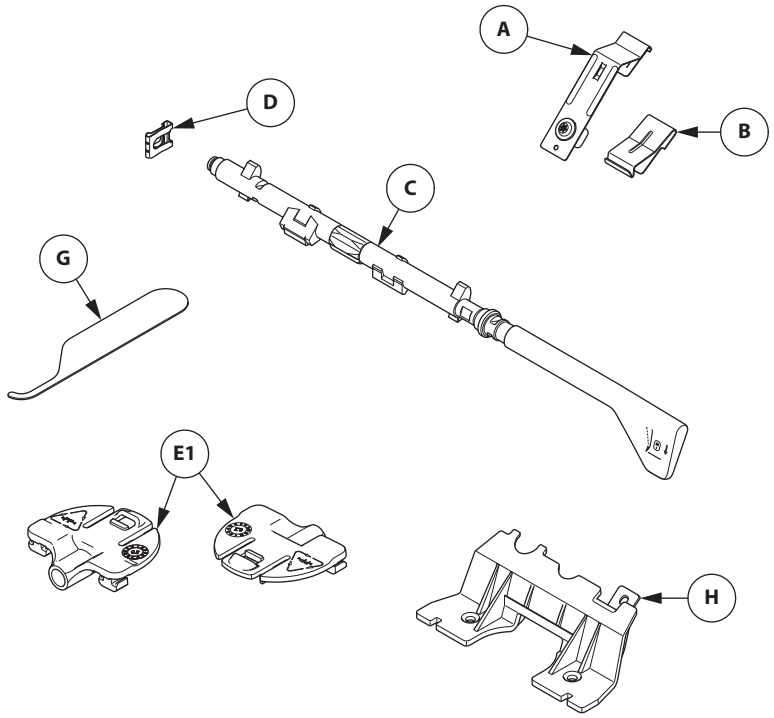


1 **Slide seat (E) back completely**

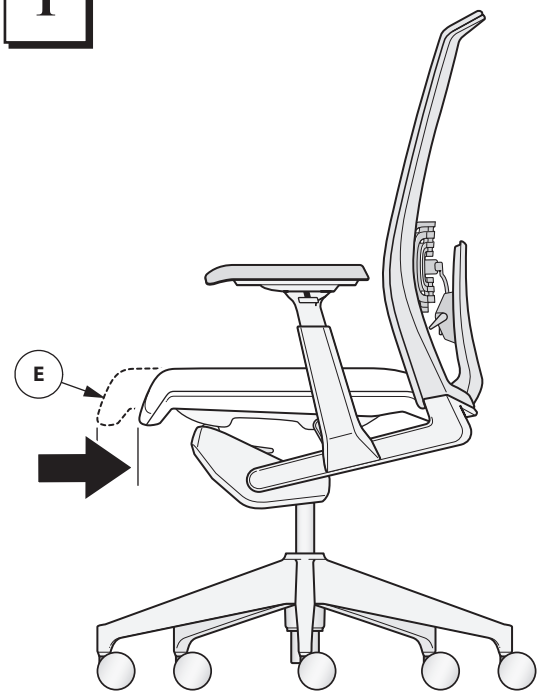

2

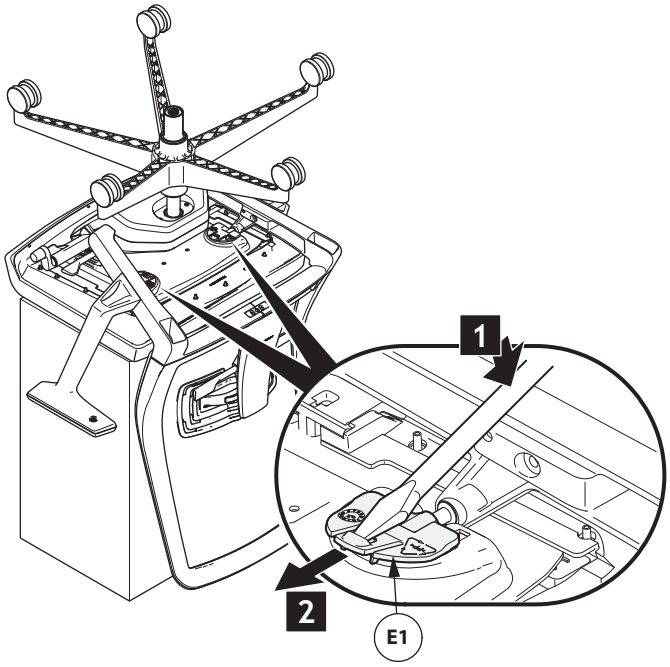


3

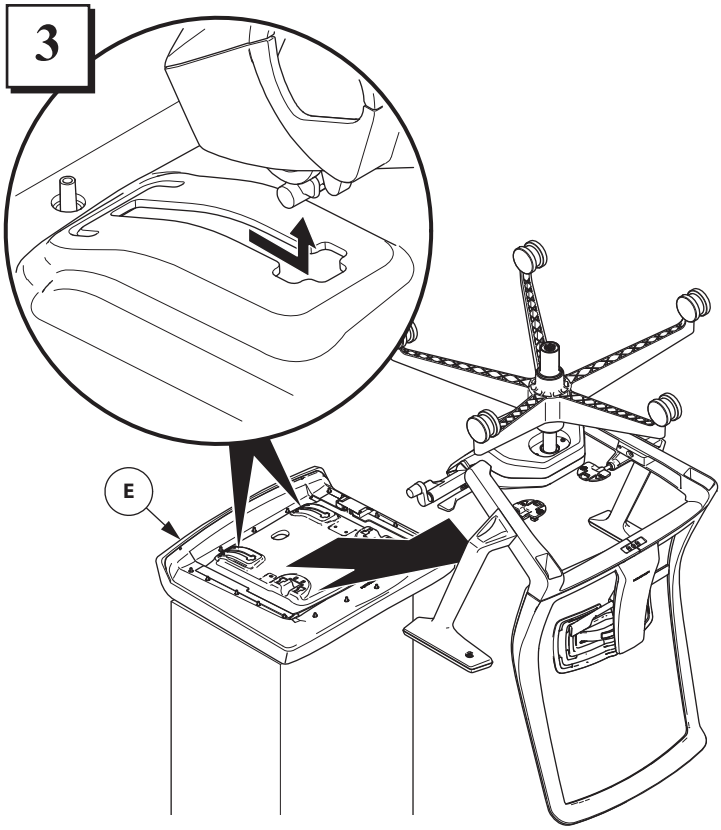


CUSTOMER SERVICE PHONE: 1-800-426-8562

4

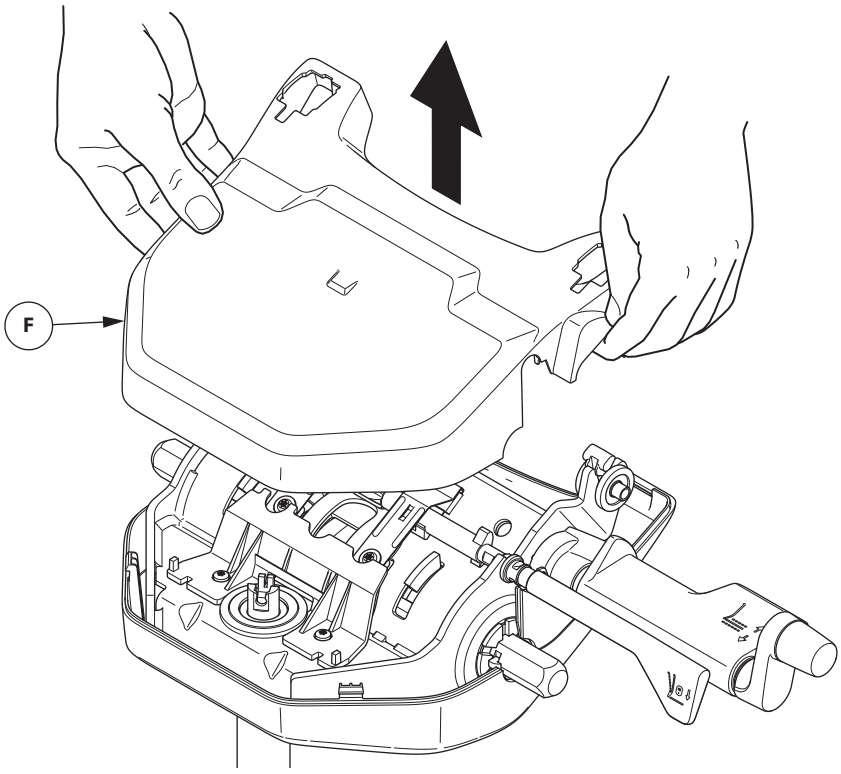


FOR NON FORWARD TILT MECH

5 **Remove and discard part, save screws**

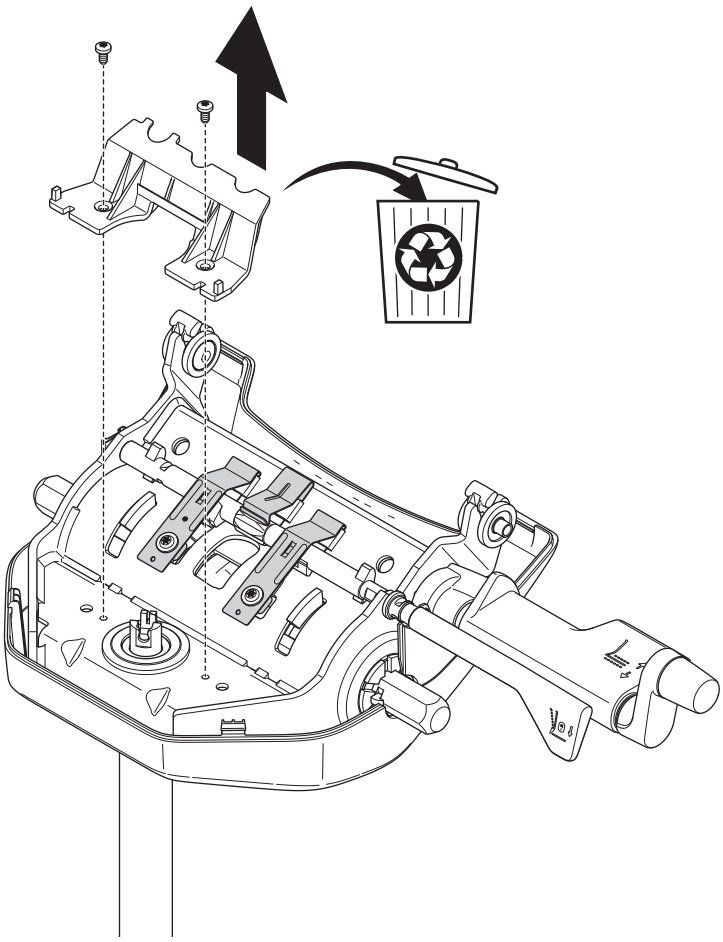


REMOVE SPRING CLIPS

6

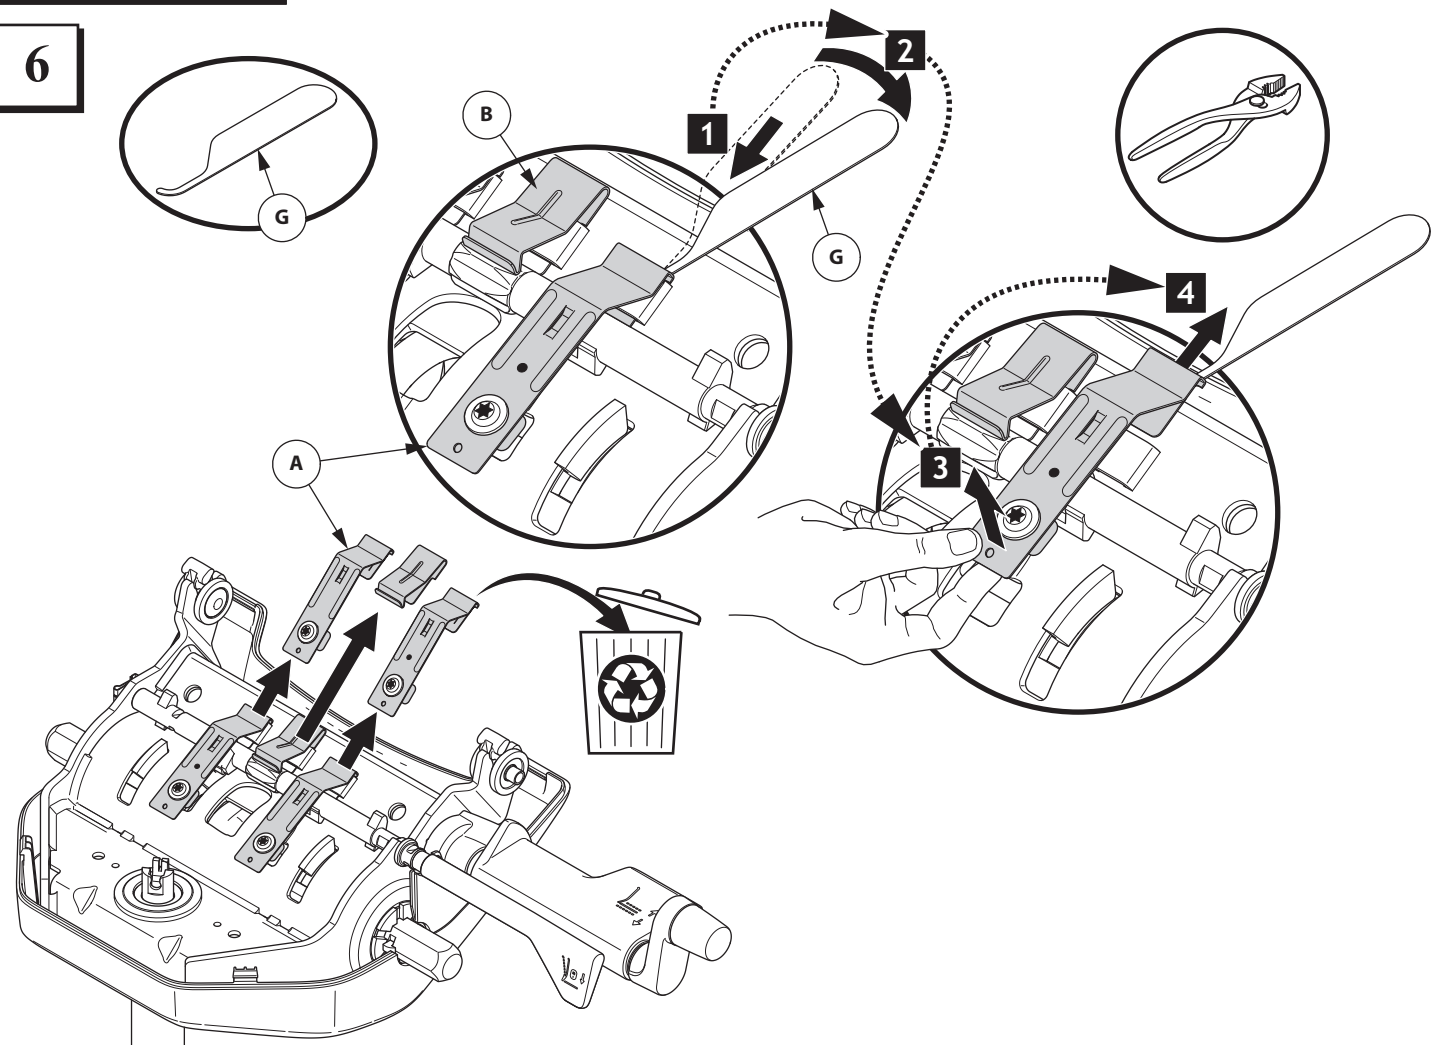

REMOVE & REPLACE ACTIVATION ARM


7

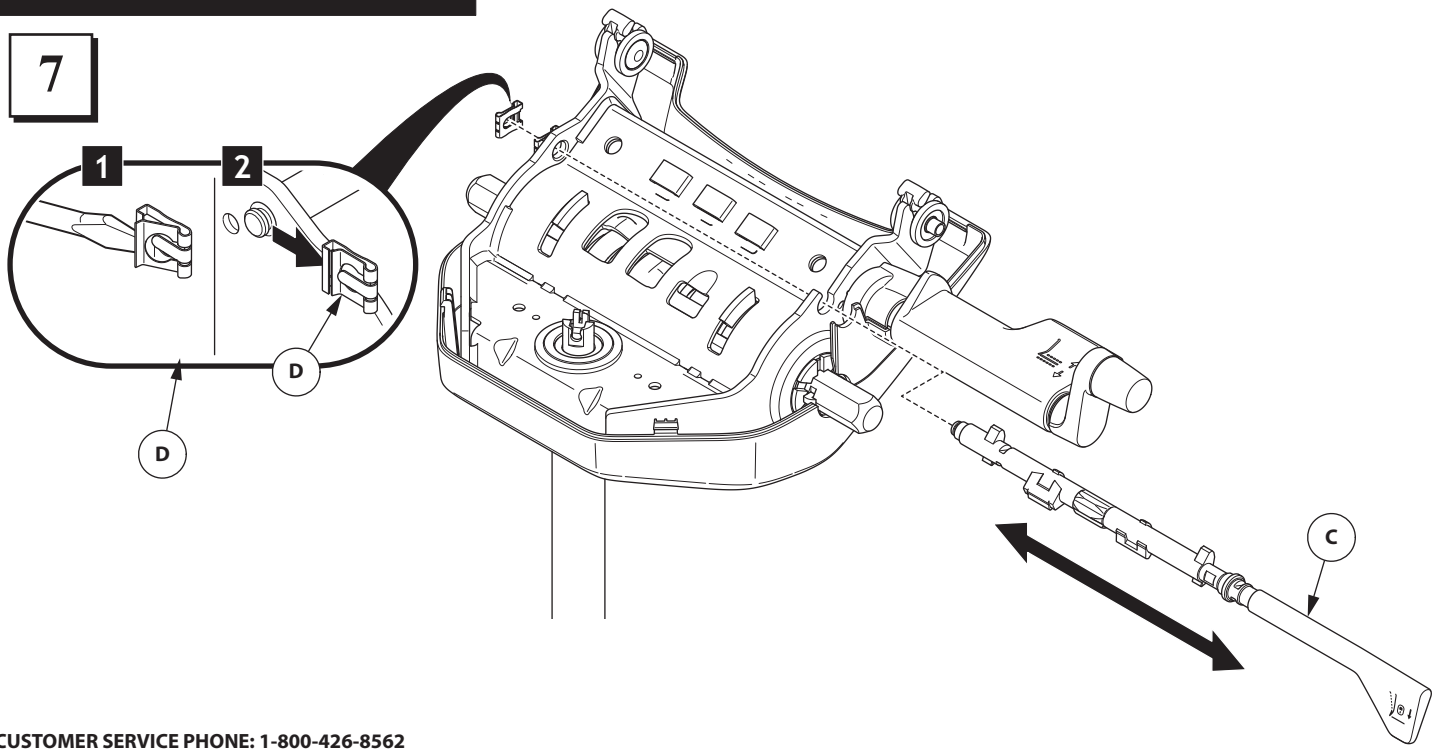

INSTALL SPRING CLIPS


8

NOTE: White Lithium Grease is supplied by the installer.

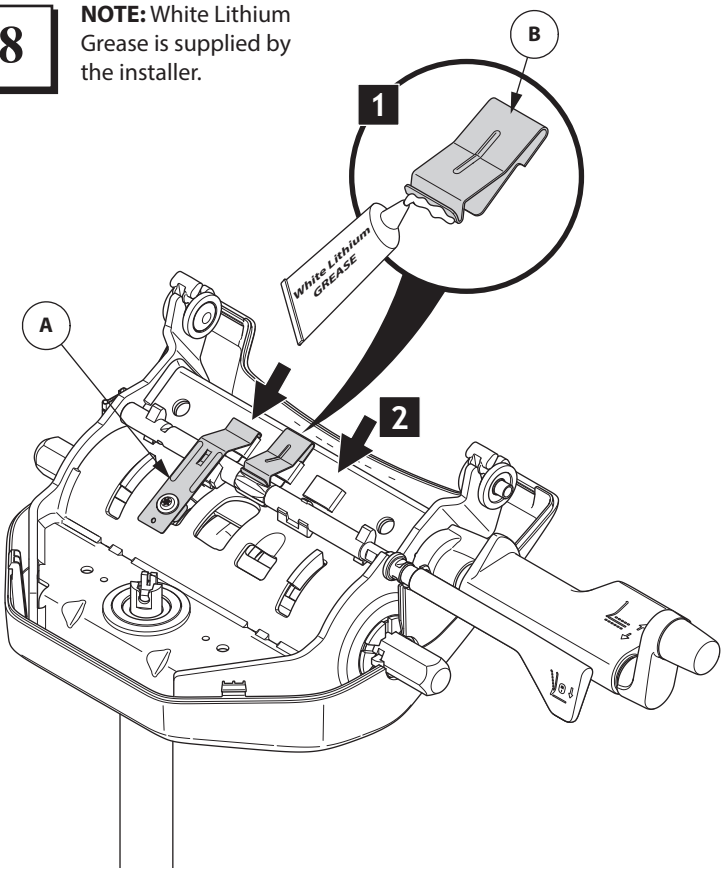

TUNING SPRING CLIPS

9

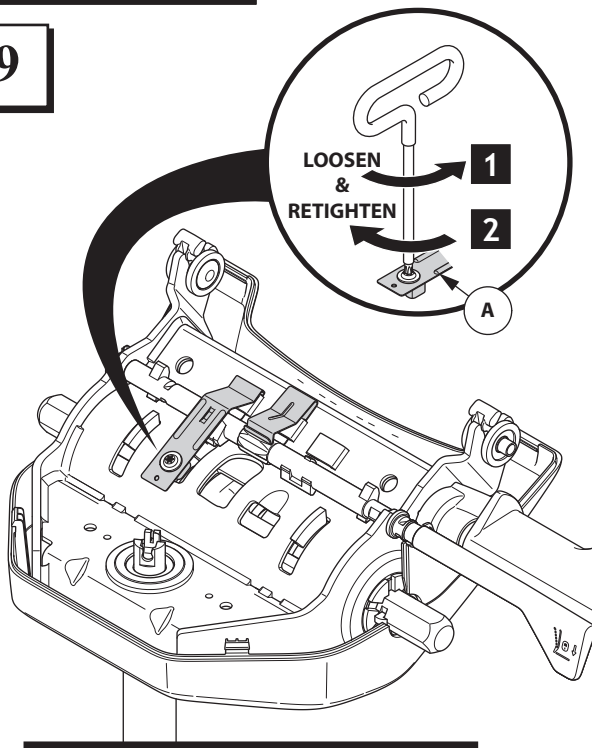

⚠ IMPORTANT!

LOOSEN AND RETIGHTEN SCREW ON SPRING CLIP (A) FOR PROPER ENGAGEMENT!

10 **Install new part, reuse screws**

