

OPENEST®

Replace Back


Installation Instructions




Tools Required




1 Rotate seat back (A) down

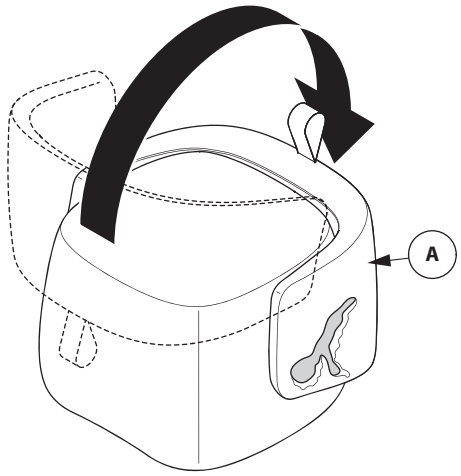


2 Unzip seat back (A)

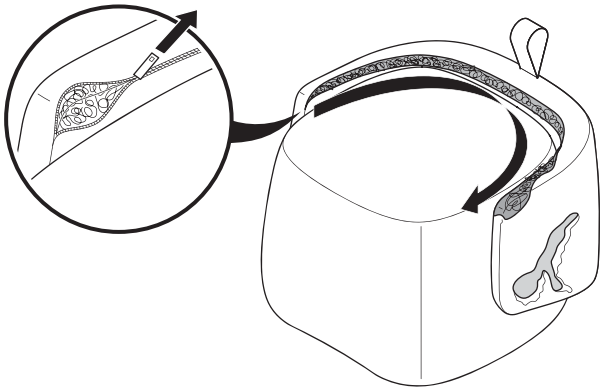

3 Remove clip (B) & washer (B1)

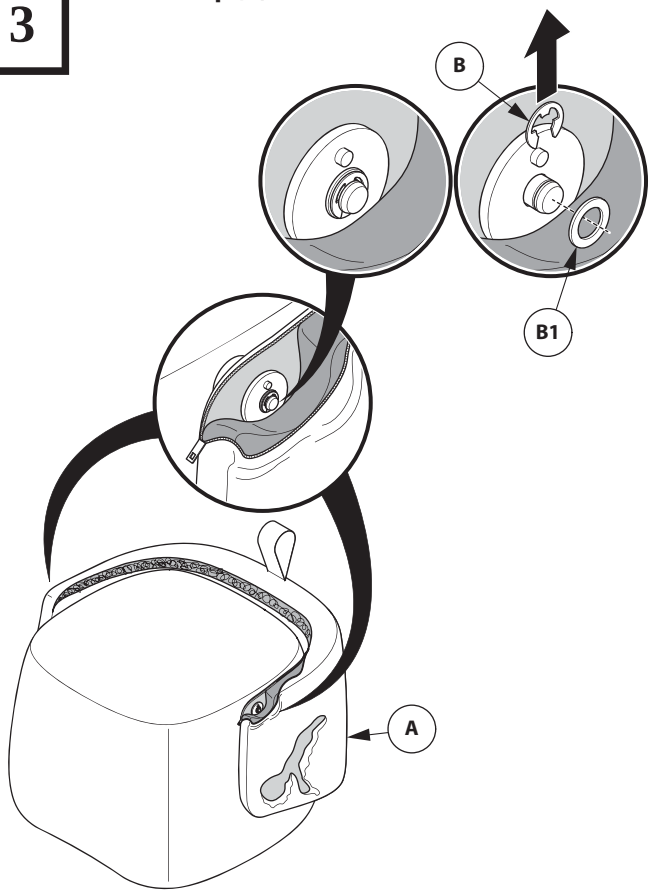


4 Remove damaged seat back (A) and recycle

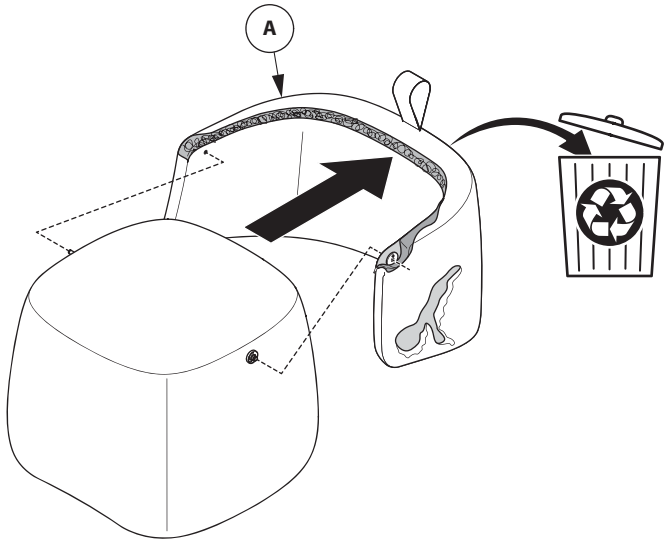


CUSTOMER SERVICE PHONE: 1-800-426-8562


5 Locate pin (C), cut material and tuck

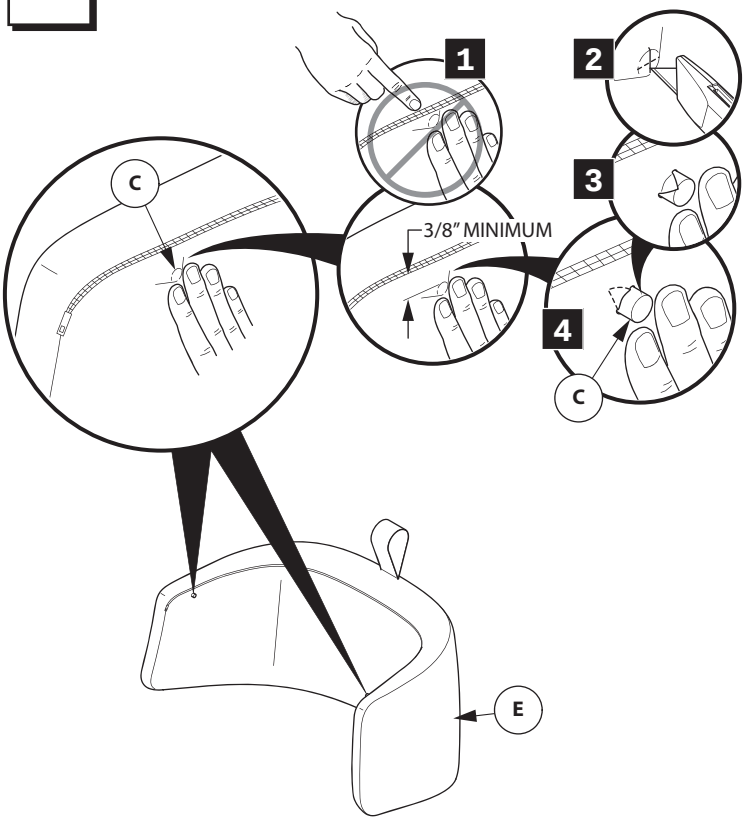


6 Locate indent and cut material (D)

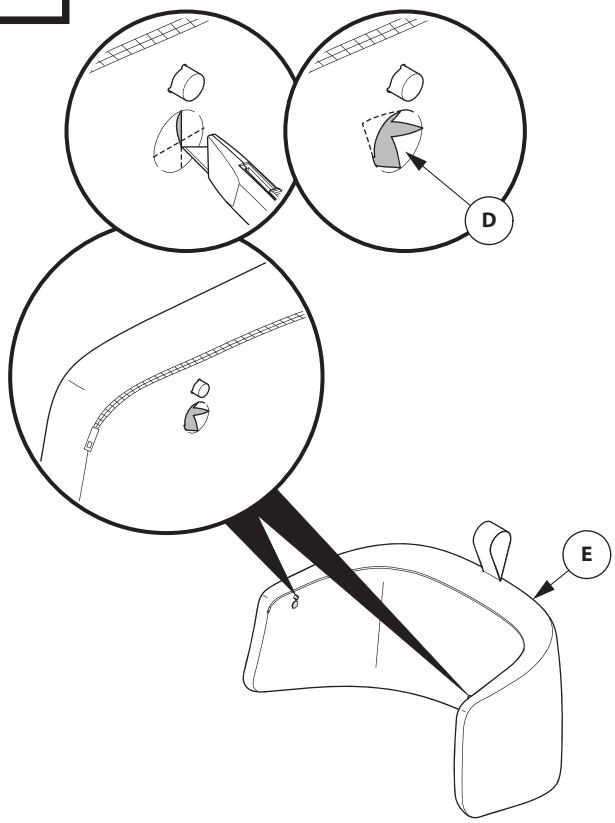

7 Install new seat back (E)

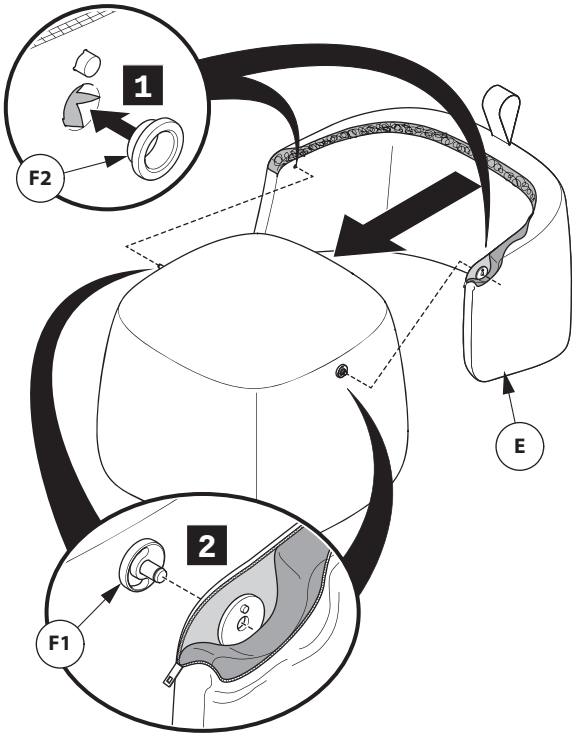


8 Reinstall washer (B1) & clip (B)

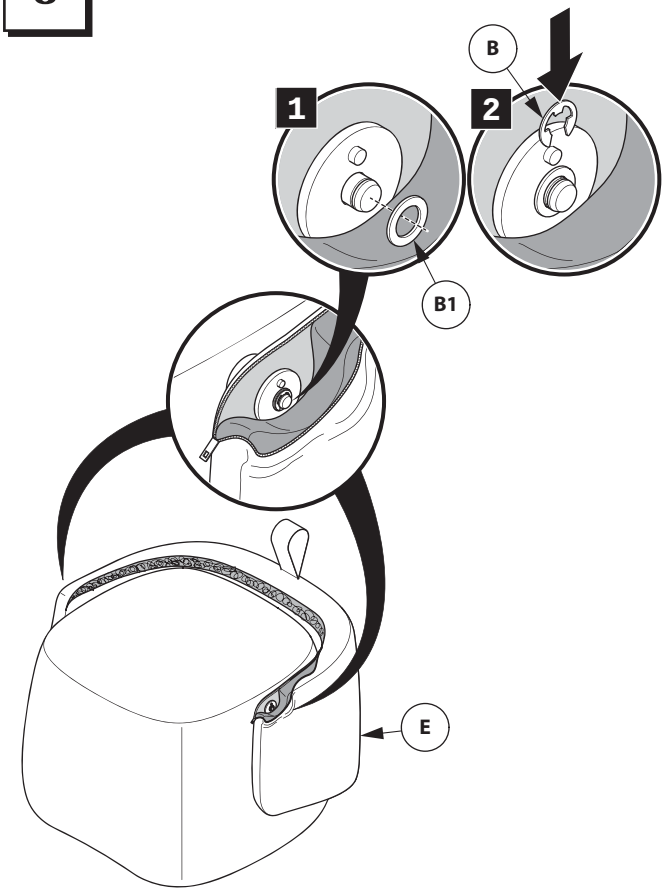

CUSTOMER SERVICE PHONE: 1-800-426-8562

9 **Zip-up seat back (E)**

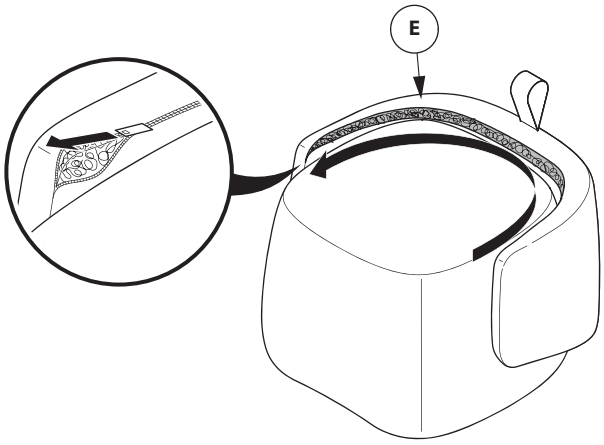

10 **Rotate seat back (E) to up postion**

