

ENHANCED PREMISE®

ADAPTER, ENHANCED PANEL TO STANDARD PANEL


Installation Instructions

Tools required

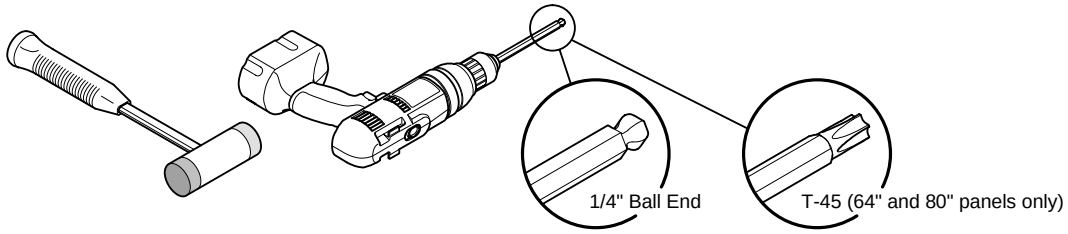




For standard glass panel modification only

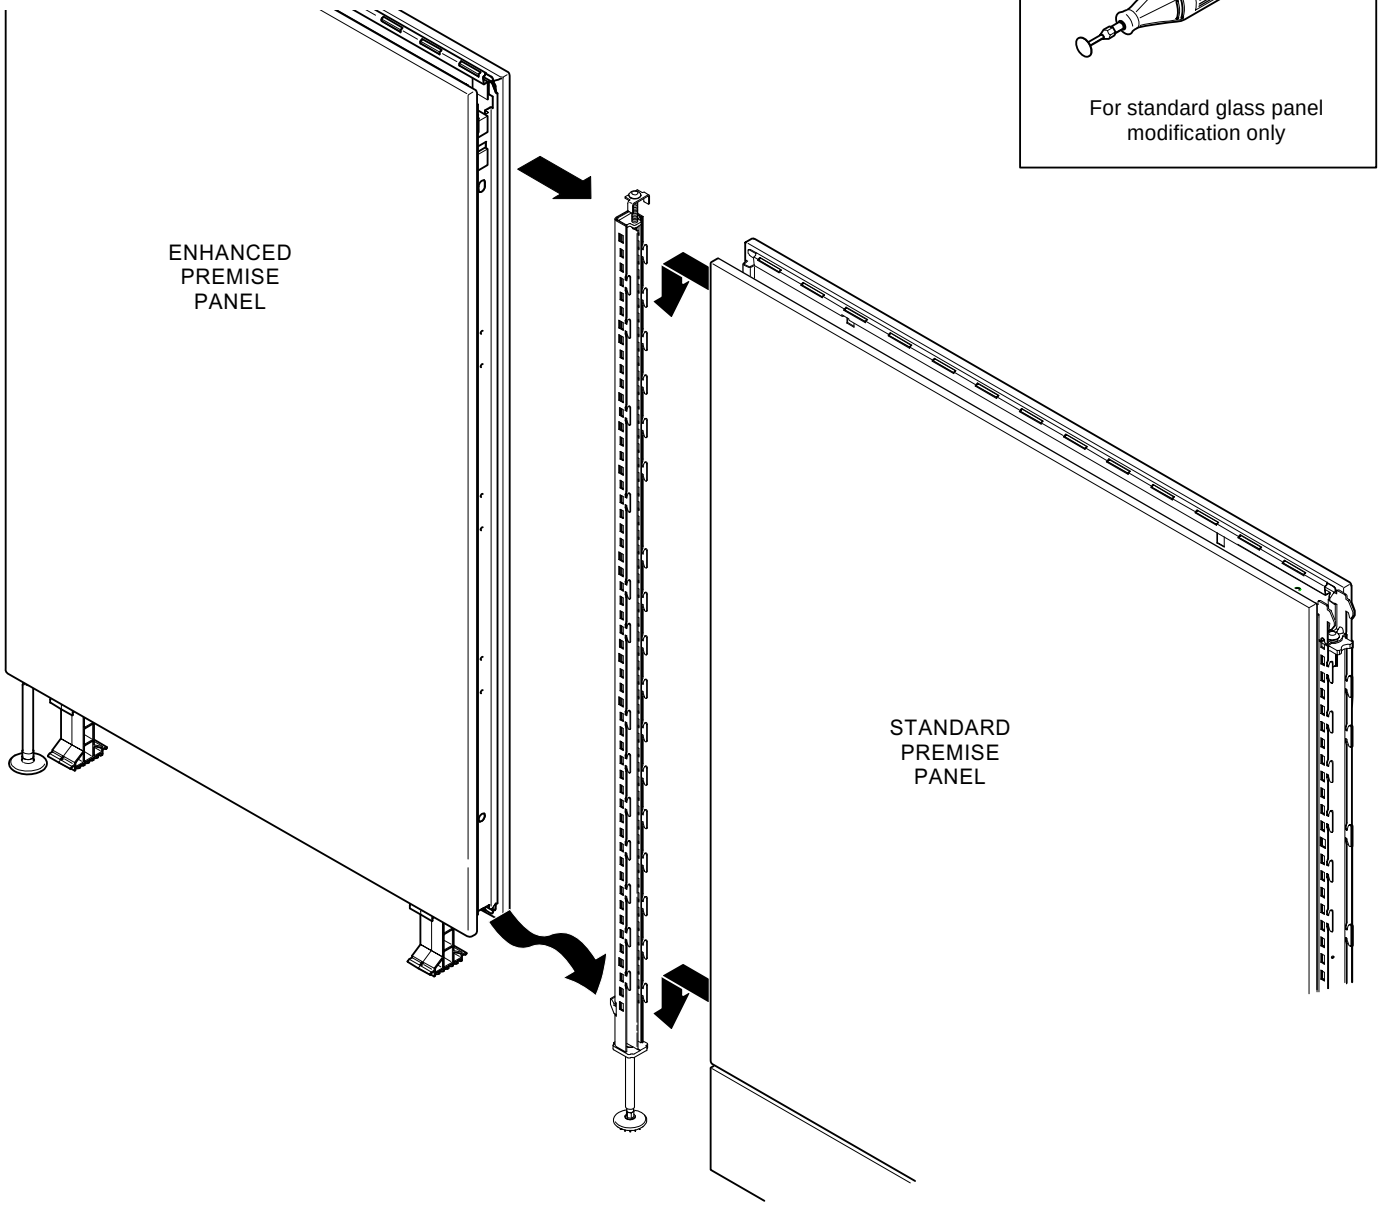


ENHANCED PANEL TO STANDARD PANEL

1 **Remove existing standard panel to which enhanced panel will connect**


2 **Install light block (A) in adapter (B)**

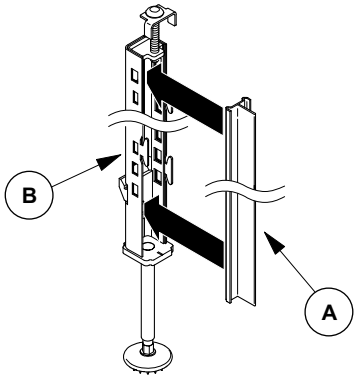



3 **For 64" and 80" standard PREMISE panels, skip to step 5. For all other heights, overturn panel and install panel lock (C)**

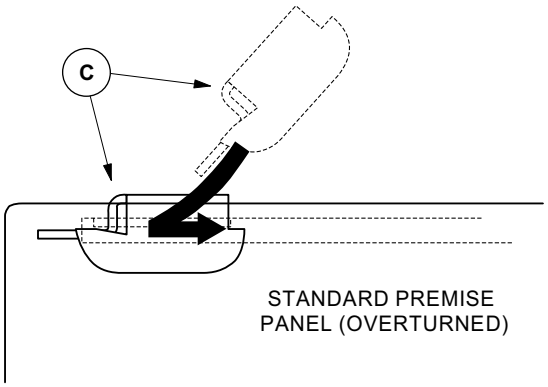


4 **Right panel if necessary, seat panel (D) on adapter hooks (E), and engage lock (C)**

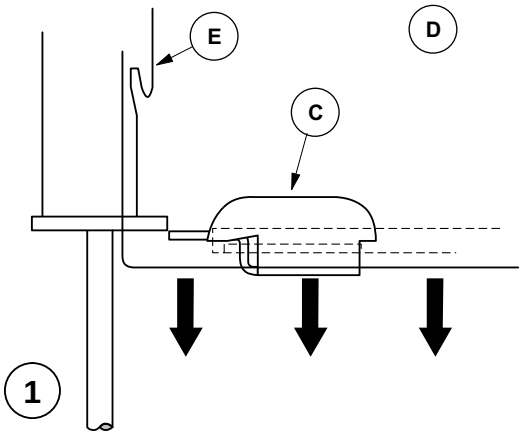

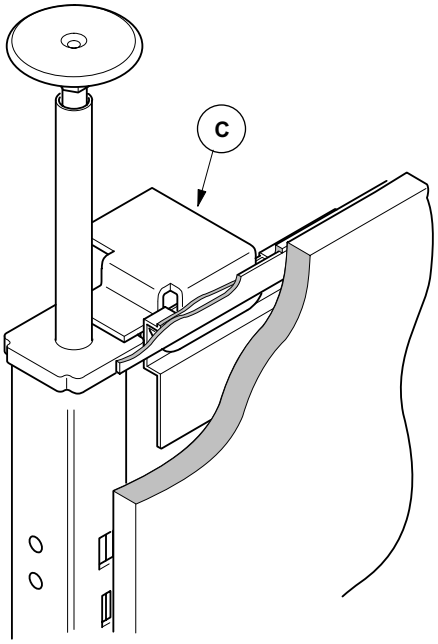

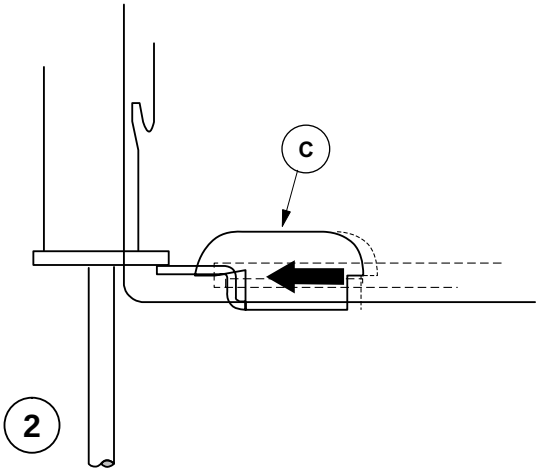

5a **(64" and 80" only) Tighten top adapter lock (F).**




CUSTOMER SERVICE PHONE: 1-800-426-8562

5b **Reattach standard PREMISE panel with adapter to panel run.**

6 **Attach Enhanced PREMISE panel (with its connector installed) to the adapter (see Panel Installation Instruction p/n 7021-7597).**

7 **Install light block (A).**

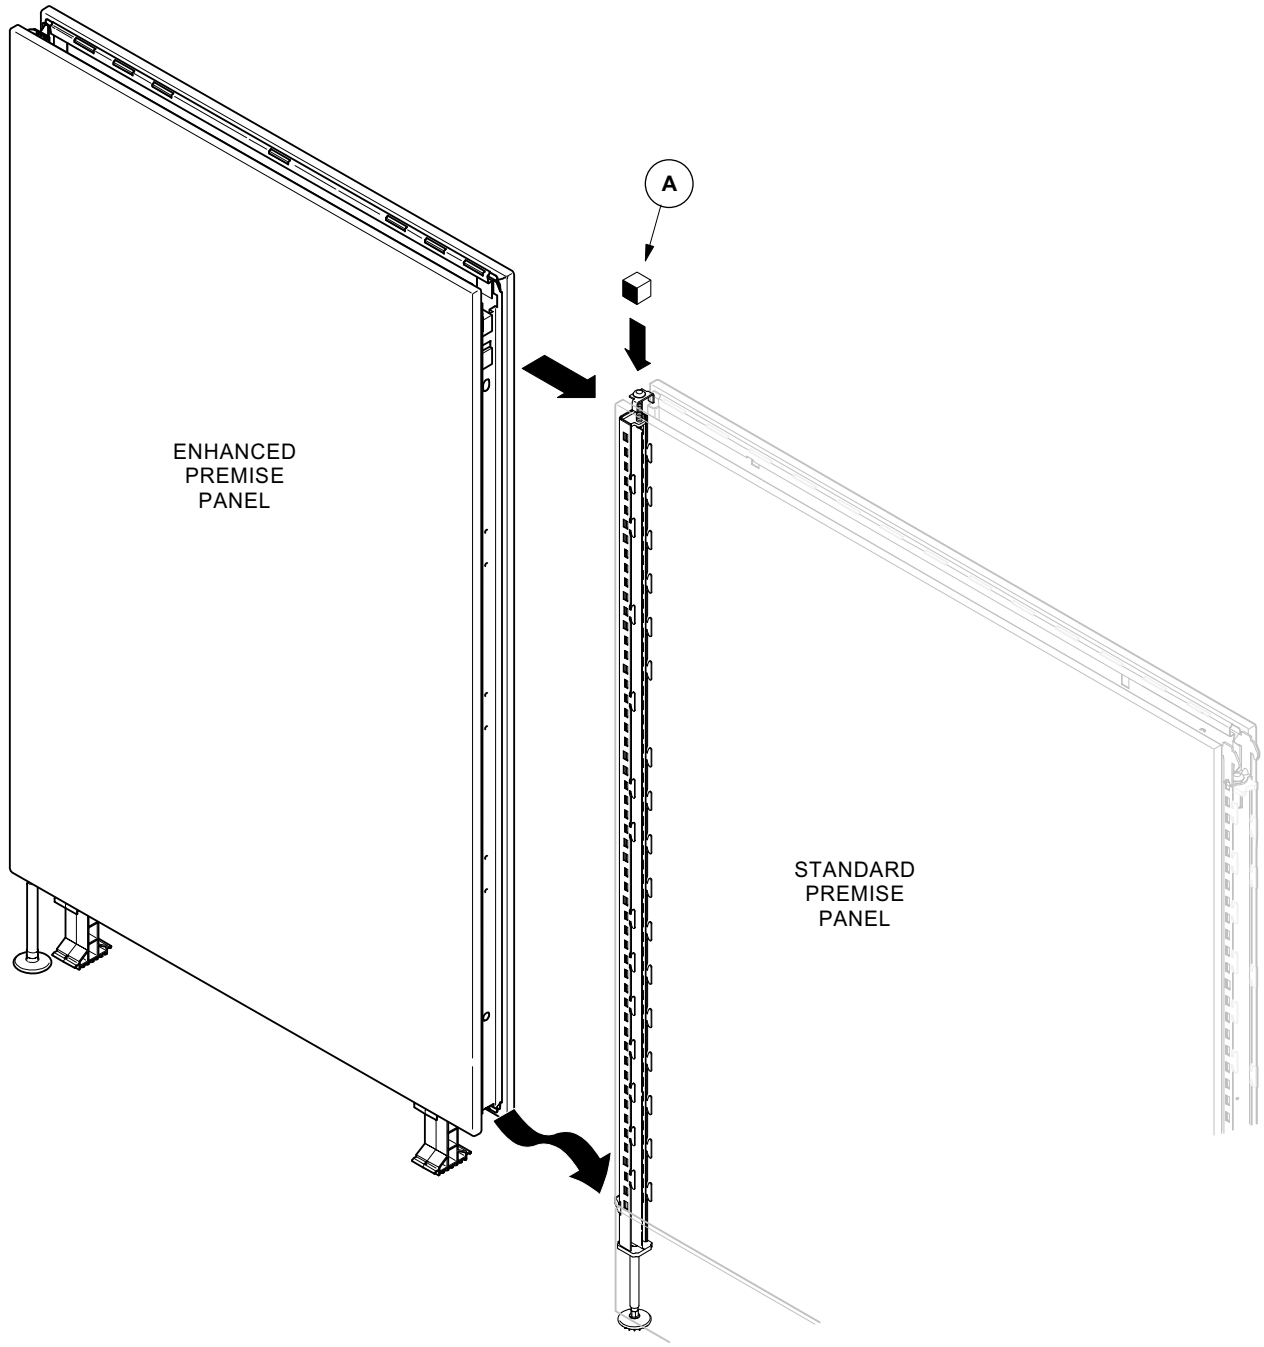

ENHANCED PANEL TO STANDARD DOOR FRAME/GLASS PANEL


1 Remove existing standard door frame/glass panel to which Enhanced panel will connect. Remove standard PREMISE connector.


2 Remove the connector mounting strip (A) from side rail of frame (B)


3 If frame cutout (C) height is greater than .915", cut height of cutout to .915"


4 Remove inner flange (D) from side rail (door frame only)

5 Replace the connector mounting strip (A) in side rail of frame (B).

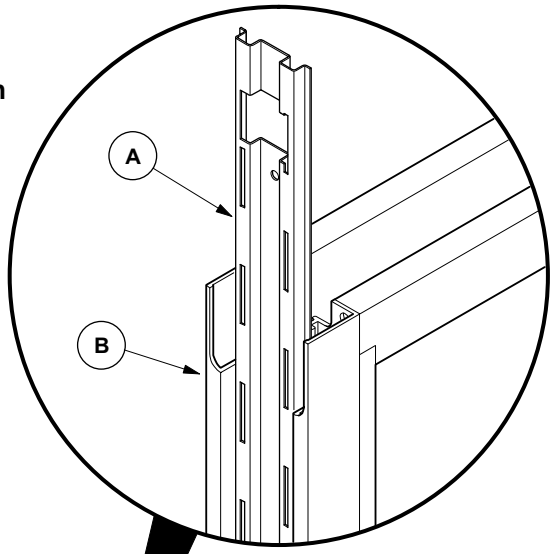

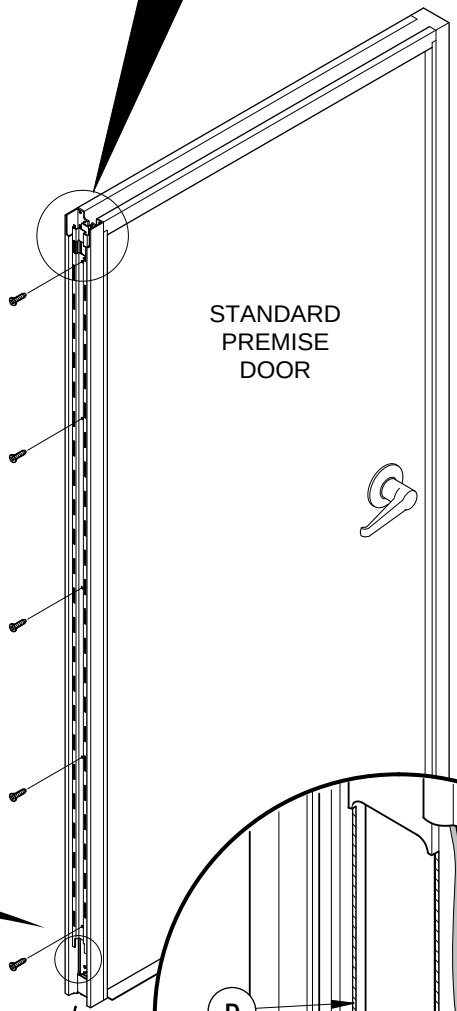

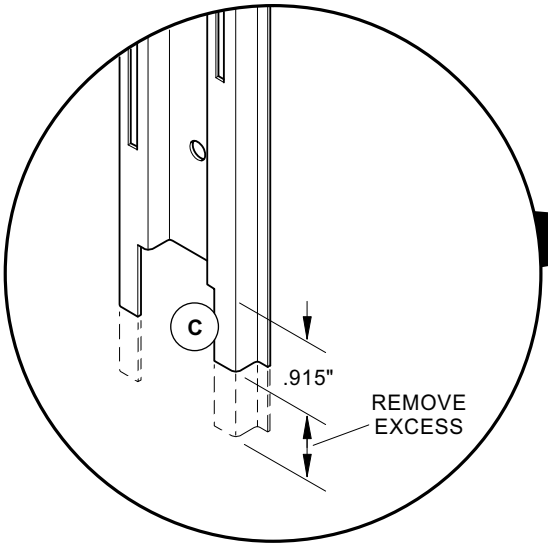

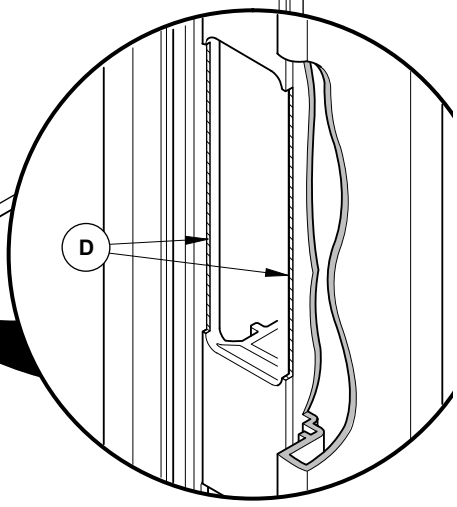


CUSTOMER SERVICE PHONE: 1-800-426-8562

6 Install light block (E) in adapter (B).

7 Seat door/glass frame (A) on adapter hooks (B).

8 Reattach standard Premise door frame/glass panel with adapter to panel run.

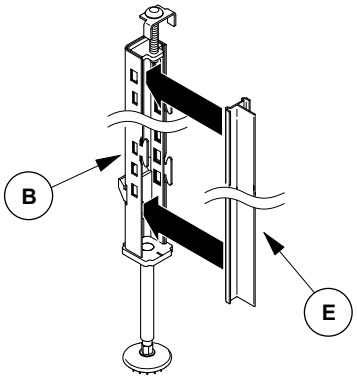

9 Attach Enhanced Premise panel (A) (with its connector installed) to adapter (B).

10 Attach monolithic panel (C) to adapter (B) (see Panel Installation Number p/n 7021-7597).

11 Install light block (D).

