RACE® TABLES
Installation Instructions

The table top will be square, round, rectangular or oval.

Tools required: Phillips head screwdriver and 3/16" allen wrench.

1. Lay the table top face down on a clean carpeted or padded floor so that the predrilled holes are exposed.

2. Depending on the style table being assembled (round or square tables see Figure 1a for correct foot sub-assembly, rectangular or oval tables see Figure 1b for correct foot sub-assembly) place the table columns on the table top, aligning the top plate holes of each column with predrilled holes in the table top.

3. Attach the column top plates to the table top inserting all eight (8) 1" long self-tapping screws provided (Fig's 1 and 2).

4. Attach the foot sub-assembly to the column using four (4) 1/4-20 x 1" long socket cap screws.

5. The glides are shipped loose in the packaging and must be inserted into the foot sub-assembly before turning table right side up (Fig. 3). After inserting the glides turn the table right side up, place a screwdriver in the slots of the glides to the level the table.

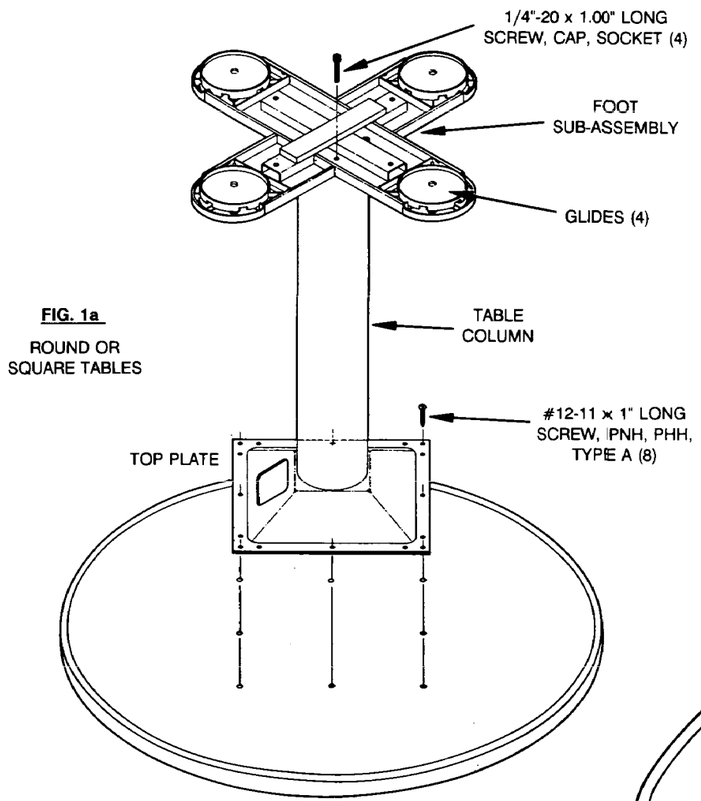


FIG. 1a

ROUND OR
SQUARE TABLES

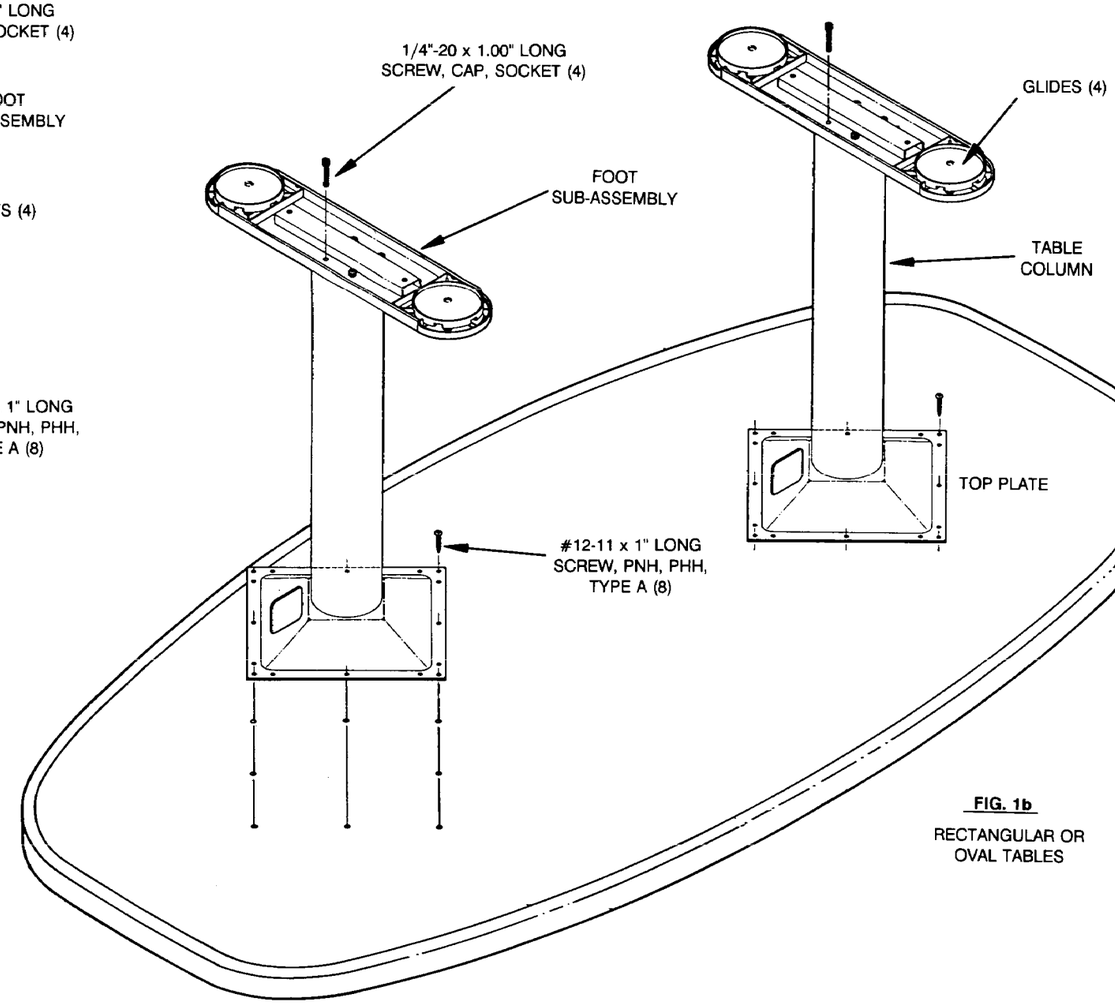


FIG. 1b

RECTANGULAR OR
OVAL TABLES

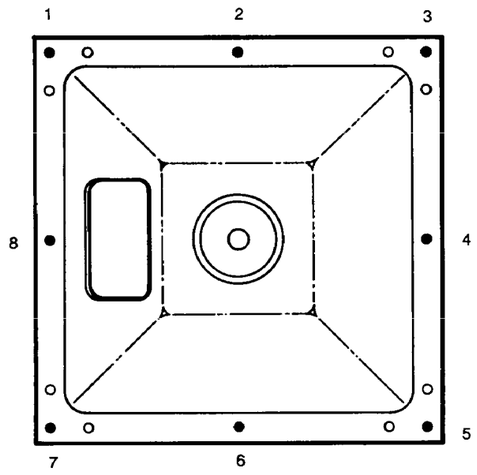


FIG. 2

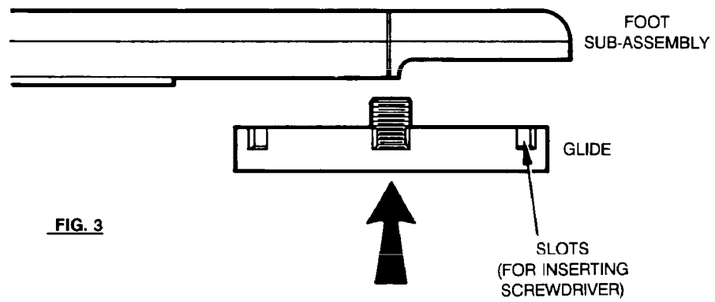


FIG. 3

CUSTOMER SERVICE PHONE: 1-800-426-8562

Part No.: 7021-6797	ECO No: 220-661	Page: 1 OF 1	Rev: B	HAWORTH