
Reed Premier™ LED Task Light

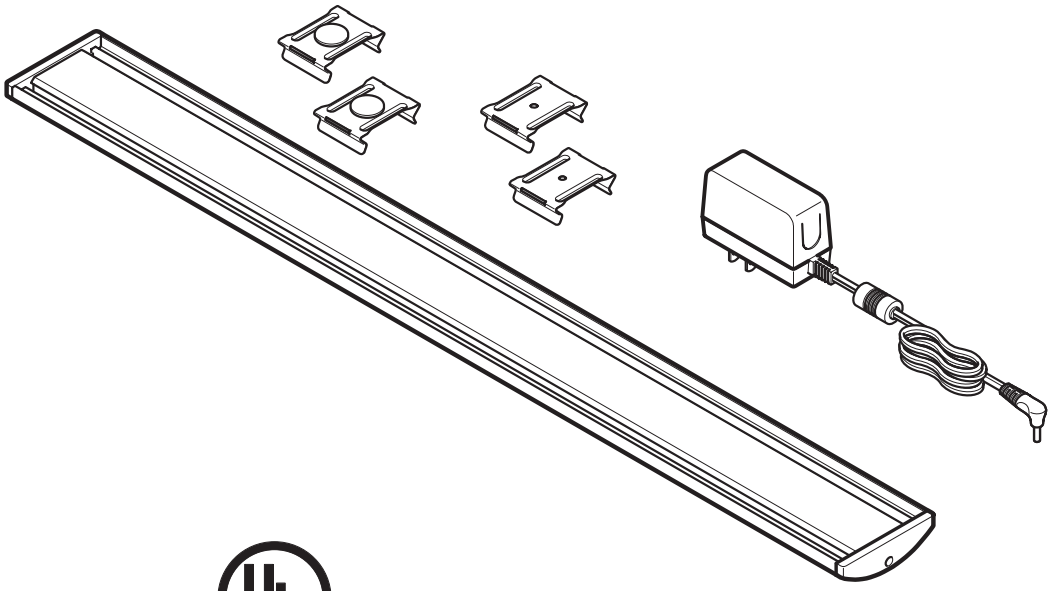

Overview

- 3, 6 or 9 LED options to support every user's lighting needs
- Color Temperature of 3500K, CRI 80
- 15 watt wall transformer power supply with a 9' black cord with molded plug
- Switch-Instand on; fase to off
- Metal trough reflector with diffuser lens
- Comes with both magnetic and screw mount options
- Clear anodized aluminum with flint color end-caps
- Dimming: holding on/off switch to cycle from 100% to 15% and back, release to achieve desired state. On/Off cycle returns to last state

Reed Premier™ LED Task Light

General Specifications

- For use with 120 volt 60 hertz electrical system.
- 3, 6 or 9 LED options (5, 10 or 15 Watts)
- Metal reflector with diffuser lens
- Includes light with screw or magnetic attachment hardware for steel, laminate or wood
- Made from 100% recyclable materials

Listings

- UL/CUL 153 listed
- California Title 24 compliant
- Made in USA


Typical Configuration

- Can be attached to steel, laminate or wood overhead storage units and hutches.

Foot Candles


3 LED light Foot Candles and IOS Plot

	18″	15″	12″	9″	6″	3″	CL	3″	6″	9″	12″	15″	18″
12″	5	7	8	1	12	15	15	14	13	11	8	6	4
9″	6	9	11	15	18	20	21	21	19	16	12	8	6
6″	8	11	15	19	24	28	29	28	25	20	16	11	7
3″	9	13	18	24	29	34	36	34	31	25	19	12	9
CL	10	14	19	26	32	37	39	37	33	28	21	13	9
3″	9	13	18	24	30	34	35	34	30	25	19	13	9
6″	8	11	15	20	24	28	29	27	25	20	16	11	8
9″	6	9	12	15	18	20	21	20	18	15	12	9	6
12″	5	7	8	11	13	15	15	14	13	11	9	7	4

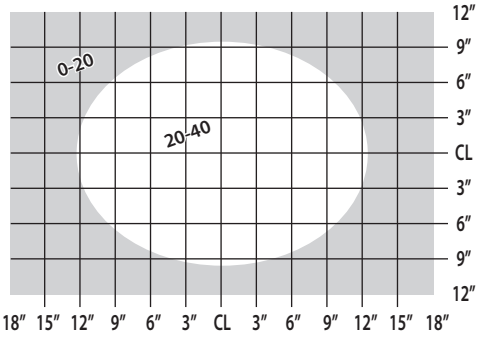


6 LED Light Foot Candles and IOS Plot

	18″	15″	12″	9″	6″	3″	CL	3″	6″	9″	12″	15″	18″
12″	9	12	18	22	26	29	30	29	26	22	17	11	9
9″	12	17	24	31	36	41	42	40	36	30	23	16	12
6″	15	22	31	41	48	56	57	54	48	40	30	21	15
3″	18	26	37	48	59	67	69	65	58	48	36	26	18
CL	19	28	39	52	64	72	74	71	63	52	39	28	19
3″	19	27	36	47	59	66	67	66	59	48	36	27	18
6″	17	23	30	39	47	53	55	53	48	40	31	23	16
9″	14	19	23	29	35	40	41	39	36	31	24	20	14
12″	10	14	17	21	24	27	28	28	25	22	18	14	10

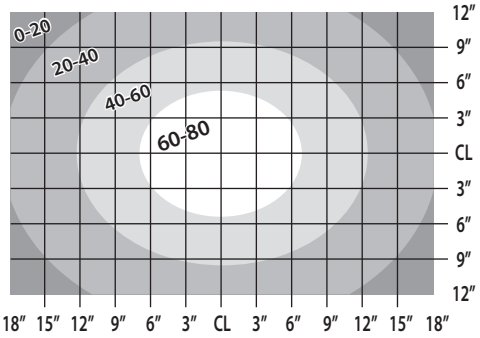

9 LED Light Foot Candles and IOS Plot

	18″	15″	12″	9″	6″	3″	CL	3″	6″	9″	12″	15″	18″
12″	13	18	23	30	36	40	42	41	37	31	24	18	13
9″	17	24	32	41	50	57	59	58	52	44	35	26	18
6″	21	30	41	54	68	78	81	78	71	59	44	32	23
3″	24	36	48	65	82	96	100	96	84	68	54	39	27
CL	27	38	52	70	88	103	109	104	92	76	57	42	28
3″	24	36	48	65	82	95	100	97	86	70	54	40	27
6″	22	31	40	54	68	77	82	79	71	60	46	34	24
9″	17	24	32	42	49	57	59	57	52	44	35	27	19
12″	13	18	23	29	35	39	40	40	37	32	24	21	15

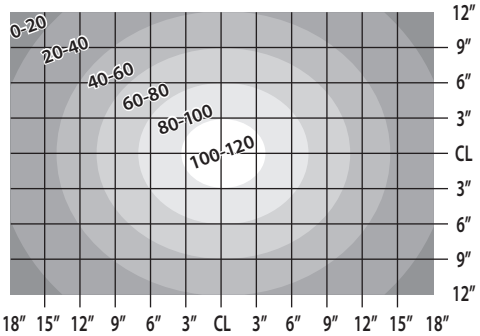

Note: The numbers inside the shaded areas represent the foot candle output on the work surface in that area.