


# HushMeet.L

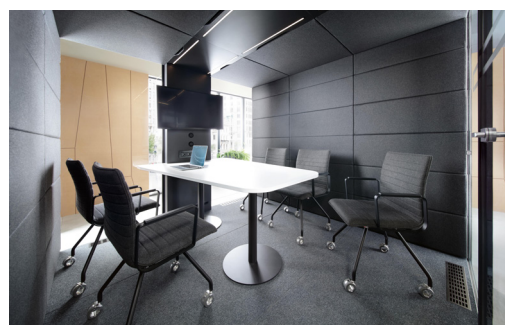

HushMeet.L is the largest acoustic booth designed for 4-8 people to work simultaneously. The HushMeet.L cabin is a great alternative to traditional conference rooms for larger business meetings, presentations and team videoconferences. Thanks to its modular form, it perfectly fits the needs of any office.

## Features


- Upholstered interior panels available in two types of fabrics in a total of forty colours
- Speech level reduction secures privacy of conversations
- Fully automatic efficient ventilation and LED lighting system to guarantee comfort and convenience
- Additional table modules adapted to the size of each HushMeet.L

**Design by**  
Hushoffice



## DIMENSION

Exterior size (2 modules)		
H: 230 cm	W: 260 cm	D: 180 cm
Interior size		
H: 202 cm	W: 238.2 cm	D: 173 cm



Exterior size (3 modules)		
H: 230 cm	W: 260 cm	D: 270 cm
Interior size		
H: 202 cm	W: 238.2 cm	D: 263 cm



Exterior size (4 modules)		
H: 230 cm	W: 260 cm	D: 360 cm
Interior size		
H: 202 cm	W: 238.2 cm	D: 354 cm

Acoustic laminated glass door  
H: 206.7 cm W: 82.4 cm  
with anodized aluminum latch handle

Acoustic laminated front side glass panels  
H: 207.9 cm W: 77.8 cm

Acoustic laminated rear side glass panels  
H: 207.9 cm W: 91.2 cm  
– clear or frosted

Column  
H: 202 cm W: 40 cm D: 12 cm

Table (optional)		
2 modules		
H: 73.5 cm	W: 120 cm	D: 120 cm
3 modules		
H: 73.5 cm	W: 180 cm	D: 120 cm
4 modules		
H: 73.5 cm	W: 240 cm	D: 120 cm

Weight 704 kg / 957.5 kg / 1211 kg

## ACOUSTICS

### Acoustic principles



Low Tones



Mid Tones



High Tones

### Acoustic performance



Absorption



Attenuation



Diffusion

## UPHOLSTERY & FINISHES

### Exterior

3 layer honeycomb board, 38 mm thickness, both sides melamine covered, finished with zero-joint edge laser technology.

### Interior panels

High-density LDF (HDF) 3 mm thickness, covered with non-flammable polyurethane foam, upholstered.

### Glass

Acoustic, laminated safety glass (RW = 35 dB), also include the thickness 2 x 5 mm glass, acoustic sheet glass, safety manifestation on front.

### Upholstery

40 colours of fabric for upholstered panels.

Petrus: 389 g/m<sup>2</sup>, 100%PL.

Wool: 325 g/m<sup>2</sup>, 70%WO, 20%PL, 5%PA, 5%AF.

### Flame retardant foam (optional)

Flexible polyurethane composition, technology without using any fluorocarbons (freons), nor with volatile organic solvents (eg. methylene chloride).

### Carpet

For commercial intensive use (designed for hotel room, hotel suite, boutique, shop, restaurant, reception, stairs).

### Door handle and hinges

Anodized aluminum or aluminum painted in dark gray.

## FEATURES AND SPECIFICATIONS

### Air ventilation system

Motion sensor activated, maximum performance of the single fan – 52 m<sup>3</sup>/h, total air change:

2 modules (8 fans) – 416 m<sup>3</sup>/h,

3 modules (12 fans) – 624 m<sup>3</sup>/h,

4 modules (16 fans) – 832 m<sup>3</sup>/h.

### Electrification

LED ceiling light. Lighting power: 27 W/2700 lm.

Power module (2 x power 230V, 2 x USB Type A, 2 x RJ45).

Motion sensor activated. Max. power consumption: 65 W.

## SEISMIC ANCHORAGE

All Hushoffice products come with Seismic Anchoring capability as standard solution.