


HushMeet.L

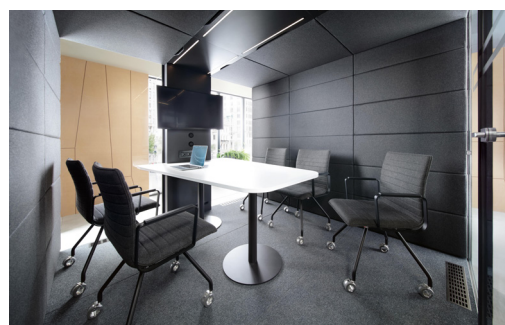

HushMeet.L is the largest acoustic booth designed for 4-8 people to work simultaneously. The HushMeet.L cabin is a great alternative to traditional conference rooms for larger business meetings, presentations and team videoconferences. Thanks to its modular form, it perfectly fits the needs of any office.

Features

- Upholstered interior panels available in two types of fabrics in a total of forty colours
- Speech level reduction secures privacy of conversations
- Fully automatic efficient ventilation and LED lighting system to guarantee comfort and convenience
- Additional table modules adapted to the size of each HushMeet.L

Design by
Hushoffice



DIMENSION

Exterior size (2 modules)		
H: 230 cm	W: 260 cm	D: 180 cm
Interior size		
H: 202 cm	W: 238.2 cm	D: 173 cm



Exterior size (3 modules)		
H: 230 cm	W: 260 cm	D: 270 cm
Interior size		
H: 202 cm	W: 238.2 cm	D: 263 cm



Exterior size (4 modules)		
H: 230 cm	W: 260 cm	D: 360 cm
Interior size		
H: 202 cm	W: 238.2 cm	D: 354 cm

Acoustic laminated glass door
 H: 206.7 cm W: 82.4 cm
 with anodized aluminum latch handle

Acoustic laminated front side glass panels
 H: 207.9 cm W: 77.8 cm

Acoustic laminated rear side glass panels
 H: 207.9 cm W: 91.2 cm
 – clear or frosted

Column
 H: 202 cm W: 40 cm D: 12 cm

Table (optional)		
2 modules		
H: 73.5 cm	W: 120 cm	D: 120 cm
3 modules		
H: 73.5 cm	W: 180 cm	D: 120 cm
4 modules		
H: 73.5 cm	W: 240 cm	D: 120 cm

Weight 704 kg / 957.5 kg / 1211 kg

ACOUSTICS

Acoustic principles



Low Tones



Mid Tones



High Tones

Acoustic performance



Absorption



Attenuation



Diffusion

UPHOLSTERY & FINISHES

Exterior

3 layer honeycomb board, 38 mm thickness, both sides melamine covered, finished with zero-joint edge laser technology.

Interior panels

High-density LDF (HDF) 3 mm thickness, covered with non-flammable polyurethane foam, upholstered.

Glass

Acoustic, laminated safety glass (RW = 35 dB), also include the thickness 2 x 5 mm glass, acoustic sheet glass, safety manifestation on front.

Upholstery

40 colours of fabric for upholstered panels.

Petrus: 389 g/m², 100%PL.

Wool: 325 g/m², 70%WO, 20%PL, 5%PA, 5%AF.

Flame retardant foam (optional)

Flexible polyurethane composition, technology without using any fluorocarbons (freons), nor with volatile organic solvents (eg. methylene chloride).

Carpet

For commercial intensive use (designed for hotel room, hotel suite, boutique, shop, restaurant, reception, stairs).

Door handle and hinges

Anodized aluminum or aluminum painted in dark gray.

FEATURES AND SPECIFICATIONS

Air ventilation system

Motion sensor activated, maximum performance of the single fan – 52 m³/h, total air change:

2 modules (8 fans) – 416 m³/h,

3 modules (12 fans) – 624 m³/h,

4 modules (16 fans) – 832 m³/h.

Electrification

LED ceiling light. Lighting power: 27 W/2700 lm.

Power module (2 x power 230V, 2 x USB Type A, 2 x RJ45).

Motion sensor activated. Max. power consumption: 65 W.

SEISMIC ANCHORAGE

All Hushoffice products come with Seismic Anchoring capability as standard solution.