
# HAWORTH collection

# HushWork





hushoffice

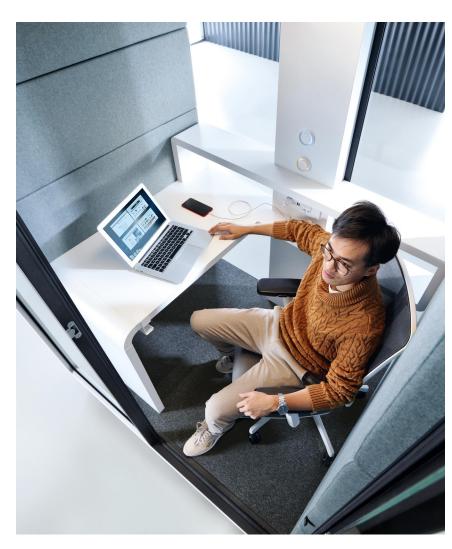



HushWork is an acoustic booth that provides a private space for working alone. It has a built-in non-adjustable desk and an ergonomic shelf with storage space. HushWork is the perfect place to work effectively in peace and quiet. Easy-to-use regulation of light and ventilation allows you to adjust the working environment to the individual needs and preferences of the user. A classic desk is a convenient place to work at the computer. The booth takes up less than 2 sqm, so it fits in most office spaces.

## Features

- Upholstered interior panels available in two types of fabrics in a total of forty colours
- Speech level reduction at 27 dB secures privacy of conversations
- Compact size easy to relocate
- Fully automatic efficient ventilation and LED lighting system to guarantee comfort and convenience

Design by Hushoffice

## **HAWORTH** collection ıllı hushoffice





Exterior size		
H: 230 cm	W: 160 cm	D: 120 cm
Interior size		
H: 202 cm	W: 138 cm	D: 113 cm
Acoustic laminat	ed glass door	
H: 206.7 cm	W: 83.3 cm	
with anodized alu	iminum latch handle	
Acoustic laminat	ed front side glass pan	iel
H: 207.9 cm	W: 58.7 cm	
Acoustic laminat	ed rear side glass pane	els
H: 207.9 cm	W: 56.2 cm	
- clear or frosted	I	
Worktop		
H: 73.5 cm	W: 75 cm	D: 54 cm
Erronomio MDE	tapered rear shelf	
LIGONOLINICIMDI		

W: 40 cm

460 kg

D: 12 cm

Weight

Column H: 202 cm

DIMENSION

#### **UPHOLSTERY & FINISHES**

#### Exterior

3 layer honeycomb board, 38 mm thickness, both sides melamine covered, finished with zero-joint edge laser technology.

#### Interior panels

High-density LDF (HDF) 3 mm thickness, covered with non-flammable polyurethane foam, upholstered.

#### Glass

Acoustic, laminated safety glass (RW = 35 dB), also include the thickness 2 x 5 mm glass, acoustic sheet glass, safety manifestation on front.

#### Tabletop

Made of 3-layer melamine chipboard, covered with white laminate, 3.8 cm thickness.

#### Shelf

Middle-density LDF (MDF), 40 mm thickness, lacquered.

#### Upholstery

40 colours of fabric for upholstered panels. Petrus: 389 g/m<sup>2</sup>, 100%PL. Wool: 325 g/m<sup>2</sup>, 70%WO, 20%PL, 5%PA, 5%AF.

#### Flame retardant foam (optional)

Flexible polyurethane composition, technology without using any fluorocarbons (freons), nor with volatile organic solvents (eg. methylene chloride).

#### Carpet

For commercial intensive use (designed for hotel room, hotel suite, boutique, shop, restaurant, reception, stairs).

#### Door handle and hinges

Anodized aluminum or aluminum painted in dark gray.

#### FEATURES AND SPECIFICATIONS

#### Air ventilation system

Motion sensor activated, 4 fans, maximum performance of the single fan - 47 m<sup>3</sup>/h, total air change - 188 m<sup>3</sup>/h.

#### Electrification

LED ceiling light. Lighting power: 17 W/1550 lm. Power module (power 230V, 2 x USB Type A). Motion sensor activated. Max. power consumption: 49.5 W.

#### ACOUSTICS

Results according to ISO 23351-1:2020. Speech level reduction - D<sub>SA</sub> 27 (dB).

## SEISMIC ANCHORAGE

All Hushoffice products come with Seismic Anchoring capability as standard solution.