


Power Tap Conduit

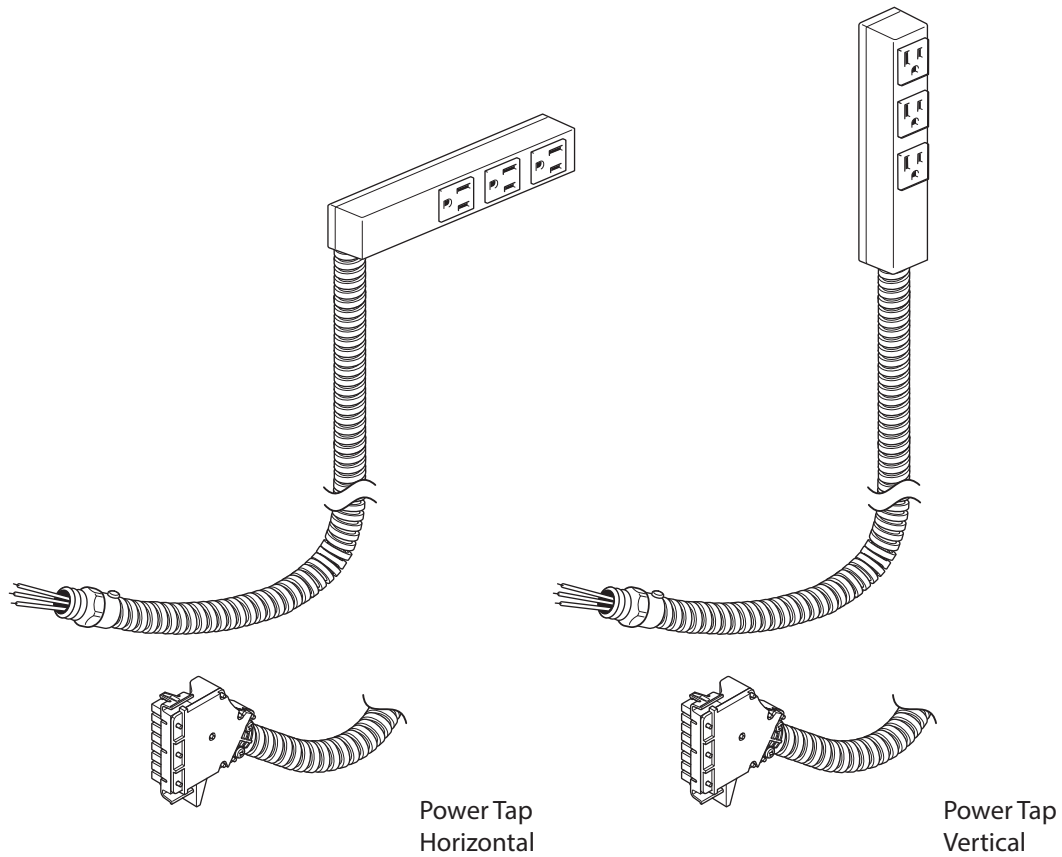

Overview

- Provides three 15 Amp outlets
- Available for connection to either 3-Circuit (separate neutral) or 4-Circuit (shared neutral 8 wire configurations or single circuit hardwire configuration)
- Available with brackets for a variety of mounting options.

Power Tap Conduit

General Specifications

- Three Outlets 15 Amp 120V 60 Hertz rated, NEMA 5-15R configuration
- Fixed circuit access with common ground access. Specify access to circuit 1, 2, 3 or 4.
- Power Base connector snaps into power distribution assembly mounted on furniture
- Modular power connector is polarity keyed for 3 circuit, 4 circuit (2+2) and 4 circuit (3+1) configurations
- 3 Circuit System
 - Three line, three neutral, and two ground conductors
 - Color coded black
- 4 Circuit System
 - Four line, two neutral, and two ground conductors
 - 4 Circuit (2+2) configuration is color coded with blue connector
 - 4 Circuit (3+1) configuration is color coded with green connector
- System polarity keyed for 3 circuit, 4 circuit (2+2) and 4 circuit (3+1)

Listings

- ETL listed per UL Subject 111 and CSA C22.2 #42

Applicable Codes


- Receptacles must be installed in accordance with the National Electrical Code (NEC), the Canadian Electrical Code (CEC) and local electrical codes

Complimentary Products

- Haworth products with work surfaces and tabletops

Typical Configuration

- Power access above or below worksurface outside of panel or table top, above worksurface of Beside® storage cabinet.

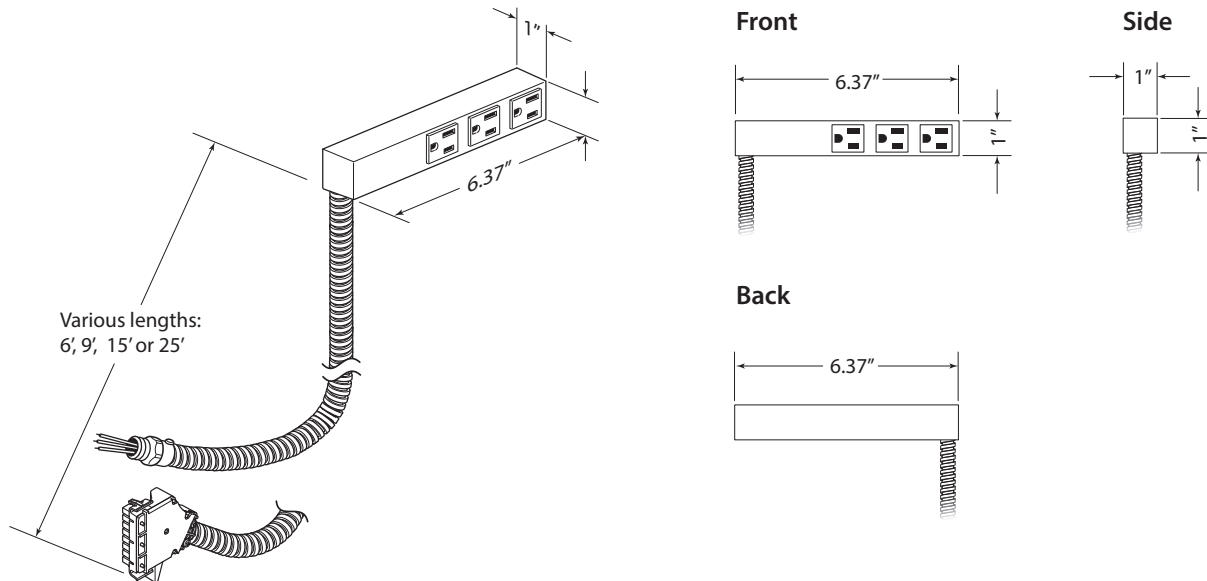

Mount Options

